

How does it work?

1. CONSTRUCTION

Start with one of our running lines or create a floor to fit the project needs

2. SELECT COLOR

Colors can be selected from our existing stocking lines or from our portfolio of films

3. SELECT SIZE

Multiple tile and plank sizes available

4. WEAR LAYER

Thickness and Texture

5. SPECIFICATION

Provided by TAS Contract


Requirements

- 30,000 SF or more per color
- 12-14 week lead-time
- No up-charge for custom
- Mock-up provided




1. CONSTRUCTION

A) DRY BACK | GLUE-DOWN

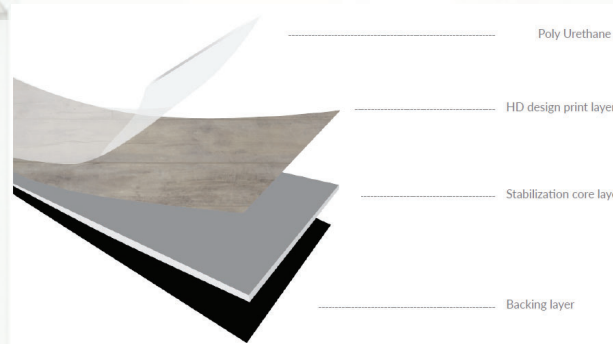

B) SPC | RIGID CORE, LOCKING SYSTEM WITH ATTACHED PAD

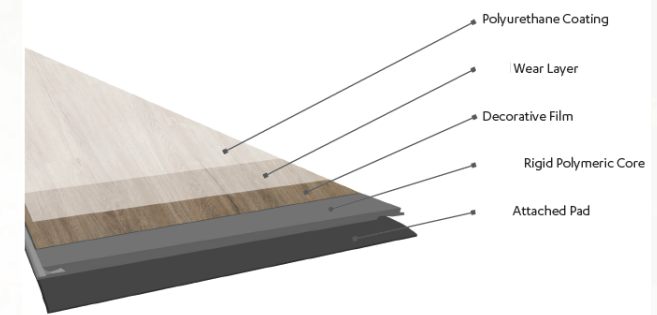

2. PICK A COLOR

- Select from our TAS Flooring lines
- Provide a color samples for our team to pull factory film options

4. SELECT WEAR LAYER



- UV Cured Polyurethane
- Optional, Ceramic Bead

3. TILE OR PLANK SIZE OPTIONS

6 x 48	7.5 x 48	9 x 48
6 x 36	4 x 24	6 x 24
12 x 24	18 x 18	18 x 36

5. THE SPECIFICATION

EXAMPLE:

TAS LV 2.5 mm Glue-Down

6 x 48

Color: Bergen 12345

12 mil UV cured polyurethane

