


EVC | 7,5 MM, 20 MIL



Acacia | JBTANDEMACAAWT

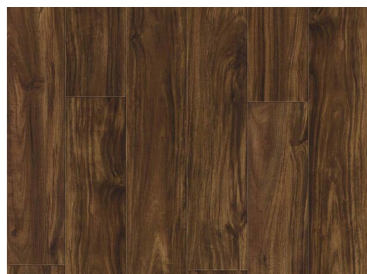

Ashford | JBTANDEMASH




Bradford | JBTANDEMBRA *



Dover | JBTANDEMDOV




Norwich | JBTANDEMNR

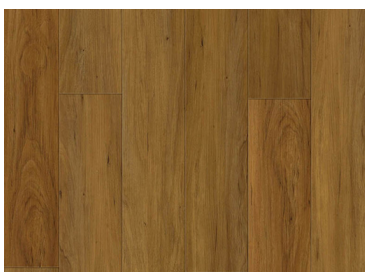


Oban | JBTANDEMOBA




Rockport | JBTANDEMROC

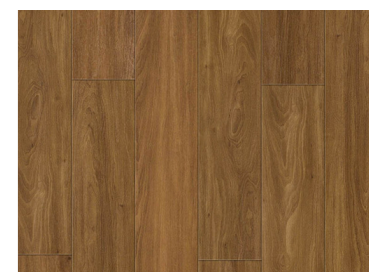


Sussex | JBTANDEMSUS

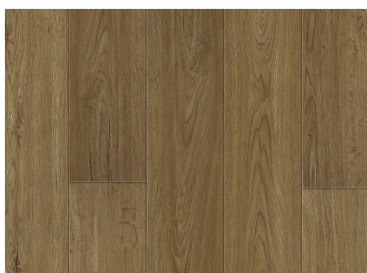

Windsor | JBTANDEMWIN *

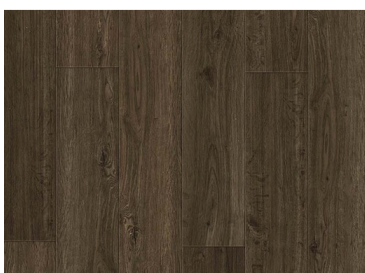

Glasgow | JBTANDEMGLA

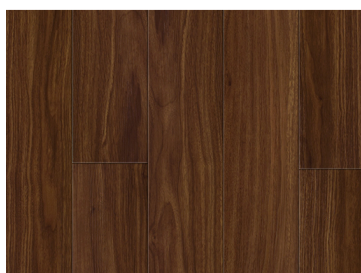

Preston | JBTANDEMPREAWT *

***THESE ARE NON-STOCK
COLORS THAT CAN BE
ORDER THROUGH OUR
PLATFORMS PROGRAM.**

SPECIFICATIONS

Construction	Engineered Vinyl Click (EVC) Waterproof Core
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	5.75" Wide x 48" Long
Overall Thickness	7.5 mm (includes 2 mm Pad)
Wear Layer	20 mil
Finish Coat	Super Protect Coating
Texture	Embossed
Edge Profile	4-Sided Micro-Beveled
Packaging	15.3 sf/ctn, 84 ctn/pal, 1285.2 sf/plt
Installation	Angle/Angle
Warranty	10yr Commercial, 10yr Multi-Family, 30yr Residential

INSTALLATION FAST FACTS

- Radiant Heat: Approved (Hydro Systems ONLY)
- Relative Humidity: 30% - 50%
- Acclimation: 24 hrs in carton
- Room Temperature: 70o
- Expansion Space: 1/4" around perimeter
- Use T-Mold in spaces larger than 26' l x 36' w
- Inspect flooring prior to installation
- Use floor protection for furniture

Read Complete Instructions Before Installing



**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE**

tascontract.com

