


# RIDGELINE CONTRACT

**TAS**  
FLOORING


SPC | 5.0 MM, 12 MIL



**Harbor** | CHCWA2292

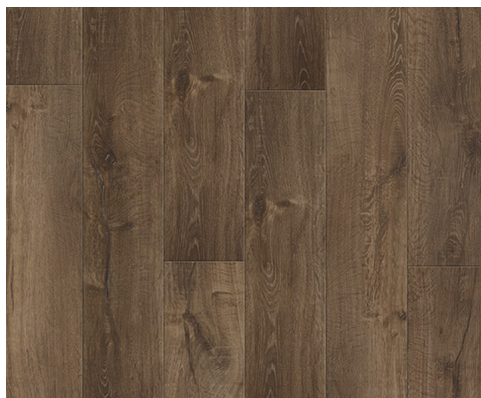


**Mokka** | CHCWA2290

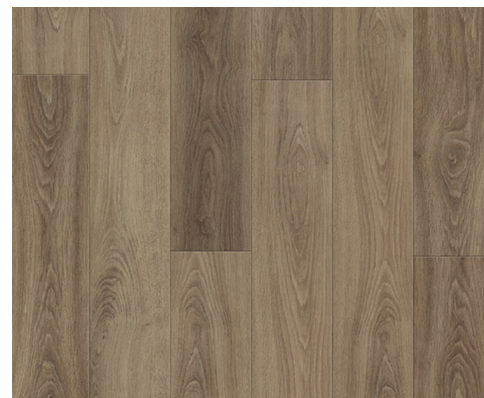


**Park Place** | CHCWA1469



**Revere** | CHCWA1468

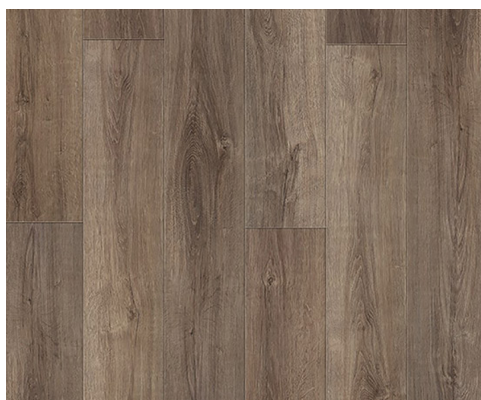

**River House** | CHCWA1862

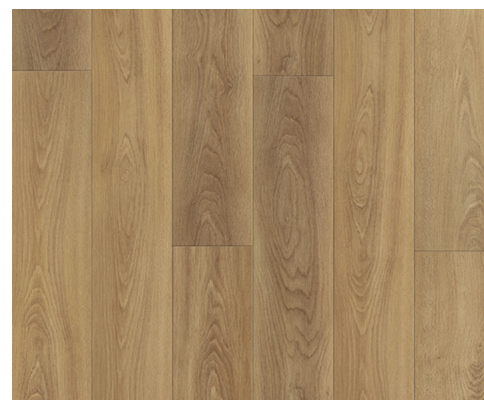

**Sugar Ridge** | CHCWA1467

## SPECIFICATIONS

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class I, Type B, Grade 2, Class B
Dimensions	7" wide x 48" Long
Overall Thickness	4.5 mm (includes 1 mm Pad)
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	30.76 sf/ctn, 50 ctn/pal, 42.1 lbs/ctn
Installation	Angle / Angle
Warranty	5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

## INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 3/16" in 10'
- Floating floors must be allowed to expand and contract with no restrictions

Read Complete Instructions Before Installing



tascontract.com

**SPEC SHEET  
WARRANTY  
INSTALLATION & MAINTENANCE  
TRIMS, TRANSITIONS & QNOSE**



Additional specifications, full installation/maintenance and warranty information available online at [TASCONTRACT.COM](http://TASCONTRACT.COM).

**TAS**  
CONTRACT

**TAS supply company, Inc.**