

TANDEM RIGID

TAS
FLOORING

SPC | 4.5 MM, 12 MIL




Dunford Bridge | ALRC00205



Coventry | ALRC00207



Whitehaven | ALRC00208

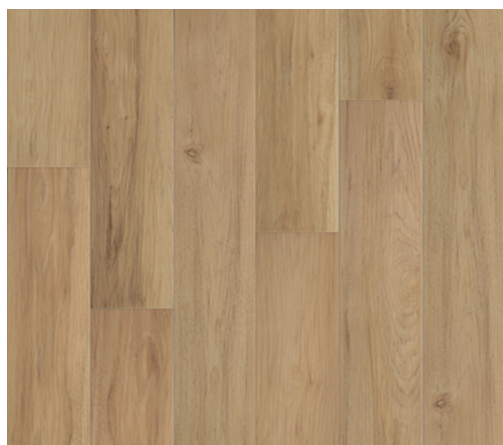

Solis | ALRC00211



Windermere | ALRC0212



Stonebrook | ALRC0213

SPECIFICATIONS

Construction	SPC, Stone Polymer Composite, Rigid Core
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	7" Wide x 48" Long
Overall Thickness	4.5 mm (included 1 mm pad)
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	28.21 sf/carton - 45 carton/pallet - 1269 sf/pallet
Installation	Angle / Angle, Float
Warranty	5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≠ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 3/16" in 10'
- Floating floors must be allowed to expand and contract with no restrictions

Read Complete Instructions Before Installing



tascontract.com

**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE**



Additional specifications, full installation/maintenance and warranty information available online at TASCONTRACT.COM.

TAS
CONTRACT

TAS supply company, Inc.