

# TANDEM WIDE



EVC | 7.5 MM, 20 MIL

|                   |   |
|-------------------|---|
| Construction      | Expanded Polymer Core, EVC                    |
| Classification    | ASTM F3261, Class I, Type B, Grade 1, Class B |
| Dimensions        | 7" Wide x 48" Long                            |
| Overall Thickness | 7.5 mm (includes 2 mm Premium Pad)            |
| Attached Pad      | 2 mm Premium Pad                              |
| Wear Layer        | 20 mil  |
| Finish Coat       | Polyurethane                                  |
| Texture           | Embossed                                      |
| Edge Profile      | 4-Sided Micro Bevel                           |
| Packaging         | 28.365 sf/ctn, 50 ctn/plt, 1418 sf/plt        |

## Installation & Maintenance

Angle / Angle

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.  
Transition required in rooms larger than 26' W x 36' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor

## Test Method & Requirements


|   |                  |                  |
|---|------------------|------------------|
| Resilient Floor in Modular Format               | ASTM F3261       | Pass             |
| Thickness (with Pad)                            | ASTM F386/ (387) | Pass             |
| Wear Layer Thickness                            | ASTM F410        | Pass             |
| Stain/Chemical Resistance                       | ASTM F925        | Pass             |
| Resistance to Heat Color Change                 | ASTM F1514       | Pass             |
| Resistance to Light Color Change                | ASTM F1515       | Pass             |
| Residual Indentation                            | ASTM F1914       | Pass             |
| Size & Squareness                               | ASTM F2055       | Pass             |
| Dimensional Stability w/Exposure to Heat        | ASTM F2199       | Pass             |
| Dimensional Stability w/Exposure to Heat        | ISO 23999        | Pass             |
| Determination of Geometrical Characteristics    | ISO 24337        | Pass             |
| Static Coefficient of Friction Polished Surface | ASTM D2047       | Exceeds Standard |
| Static Load Limit                               | ASTM F970        | Pass > 250 LBS   |
| Flammability/Radiant Flux                       | ASTM E648        | Class I          |
| Smoke Density                                   | ASTM E662        | Pass             |
| Impact Insulation Class IIC                     | ASTM E492*       |                  |
| Sound Transmission Class STC                    | ASTM E90*        |                  |

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

## Health & Environmental

FloorScore SCS Certified

Phthalate Free

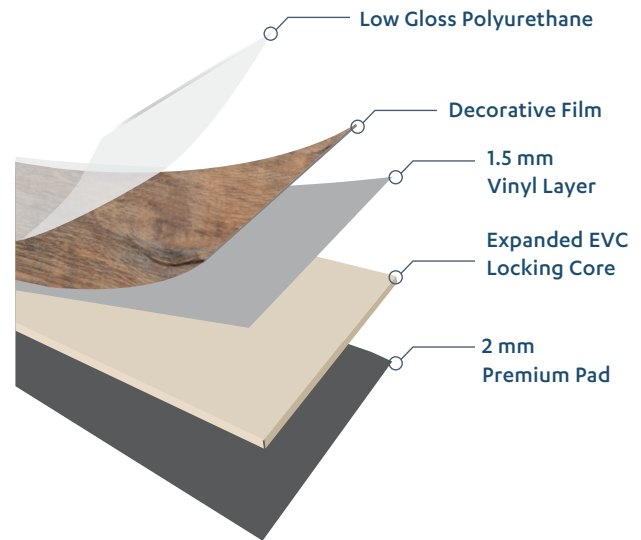

## Warranty


10 Yr Light Commercial, 10 Yr Multi-Family, 30 Yr Residential

## Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNoise](#) Stair Nosing

## Layout Options:



ASHLAR



STAGGER

