

EQUINOX MULTI



LAMINATE | 13.5 MM, EVA PAD



Stonehill | CH5011271007



Countryside | CH5010770005



Rivera | CH5010773009




Schooner | CH5011000004



Landau | CH50101390003



Skyway | CH50101785002

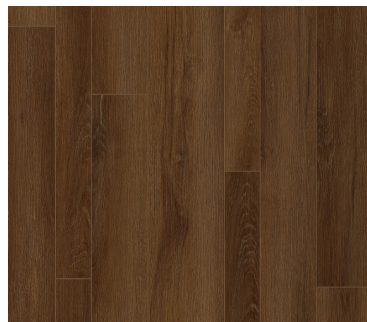

Hampton | CH50101795002



Charot | CH50101810003

SPECIFICATIONS

Construction	Laminate AtroGuard Core
Classification	EN 13329
Dimensions	7.5" Wide x 48" Long
Overall Thickness	13.5 mm (includes 1.5 mm EVA Pad)
Wear Surface	AC4
Texture	Embossed
Edge Profile	4-Sided Micro-Bevel
Packaging	22.54 sf/ctn, 33 ctn/plt, 743.82 sf/plt
Installation	TightLock (Drop/Tap)
Warranty	12 Yr Light Commercial, 15 Year Multi-Family, Lifetime Residential

INSTALLATION FAST FACTS

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimation: 48 hrs unopened carton
- Moisture Content: Not to Exceed 2.5%
- Expansion Space: 3/8" gap
- Transitions not required in rooms up to 66' w or 66' long
- Inspect flooring prior to installation
- Use floor protection for furniture

Read Complete Instructions Before Installing



SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & [QNOSE](#)

tascontract.com

"Our AtroGuard Core is more dense and resistant to swelling. TightLock blocks water from penetrating the floor for at least 72 hours. The attached 1.5mm pad reduces noise transfer and adds comfort underfoot."

