

GLUE DOWN | 3.0 MM, 20 MIL

| | |
|-------------------|---|
| Construction | Solid Luxury Vinyl |
| Classification | ASTM F1700, Class III, Type B |
| Dimensions | 7.25" Wide x 48" Long |
| Overall Thickness | 3.0 mm |
| Attached Pad | N/A |
| Wear Layer | 20 mil |
| Finish Coat | Polyurethane Glass Bead |
| Texture | Embossed-In-Register |
| Edge Profile | 4-Sided Micro-Bevel |
| Packaging | 34.90 sf/ctn, 50 ctn/pal, 1745 sf/plt, 40 lbs/ctn |

Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as WF Taylor Fresh Floors


Recommended Adhesives: - Dynamic, Transitional Pressure Sensitive, firm set
- Pinnacle, Premium Transitional Pressure Sensitive, hard set

Test Method & Requirements

| | | |
|---|------------|-----------------------------|
| Solid Vinyl Floor Tile | ASTM F1700 | Pass |
| Flexibility | ASTM F137 | Pass |
| Thickness | ASTM F386 | Pass |
| Wear Layer Thickness | ASTM F410 | Pass |
| Resistance to Heat Color Change | ASTM F1514 | Pass |
| Resistance to Light Color Change | ASTM F1515 | Pass |
| Residual Indentation | ASTM F1914 | Pass |
| Size & Squareness | ASTM F2199 | Pass |
| Static Coefficient of Friction Polished Surface | ASTM D2047 | Exceeds Standard |
| Static Load Limit | ASTM F970 | Pass > 250 LBS |
| Flammability/Radiant Flux | ASTM E648 | Class I |
| Smoke Density | ASTM E662 | Pass |
| Slip Resistance | DIN 51130 | Angle: 18.7° Rating: R10 |

Health & Environmental

FloorScore SCS Certified
Phthalate-Free

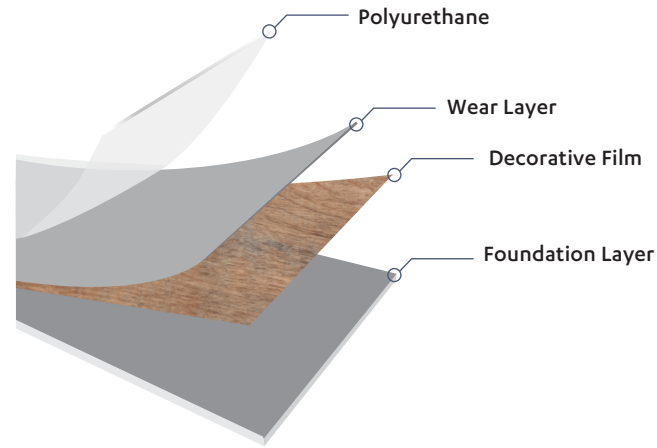


Warranty


15 Yr Commercial, 15 Yr Multi-Family, Limited Lifetime Residential.

Layout Options:


NOT TO SCALE




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET



ASHLAR



STAGGER

