


RIDGELINE

TAS
FLOORING


SPC | 5.0 MM, 12 MIL

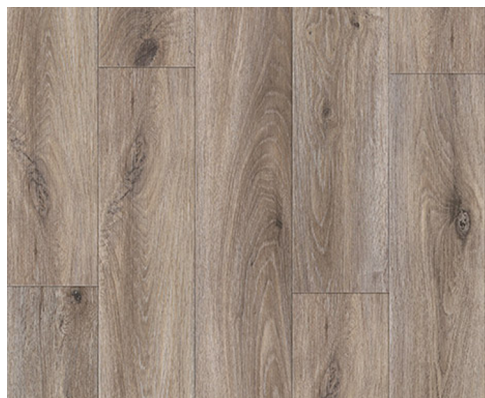


Alpine | CHCWA330V




Talus | CHCWA263V

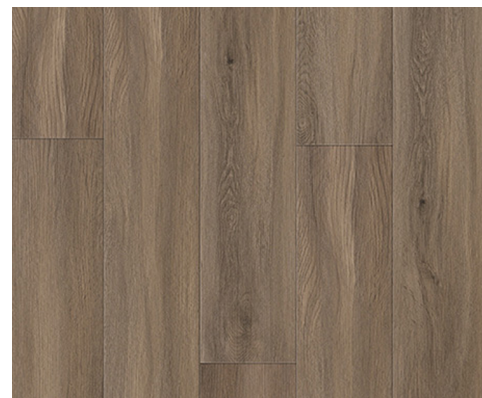

Summit | CHCWA933V

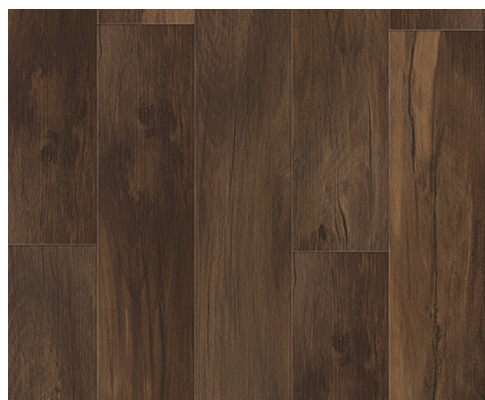

Terra | CHCWA1370V

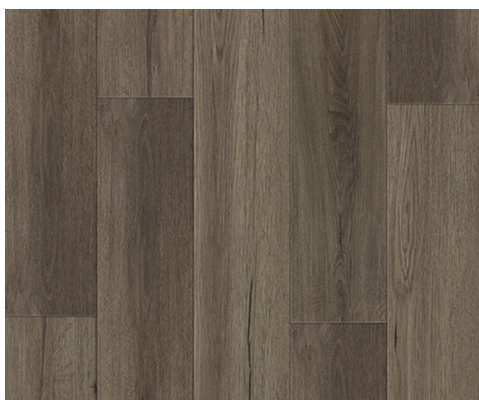

Vista | CHCWA1351V



Viewpoint | CHCWA1500V

SPECIFICATIONS

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class I, Type B, Grade 2, Class B
Dimensions	7" wide x 48" Long
Overall Thickness	5.0 mm (Includes 1 mm Premium Pad)
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	25.27 sf/ctn, 55 ctn/pal, 1390 sf/plt, 43.5 lbs/ctn
Installation	Angle / Angle
Warranty	5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 3/16" in 10'
- Floating floors must be allowed to expand and contract with no restrictions

Read Complete Instructions Before Installing



tascontract.com

**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE**



TAS
CONTRACT

Additional specifications, full installation/maintenance and warranty information available online at TASCONTRACT.COM.

TAS supply company, Inc.