

SPC | 5.0 MM, 20 MIL



Skyfall | TPRC0104



Vaughn | TPRC0105




Colby | TPRC0106



Dory | TPRC0107



Racine | TPRC0108

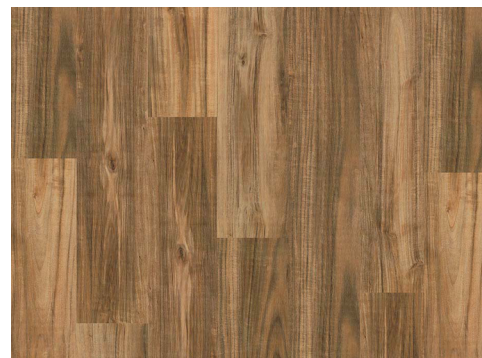

Kona | TPRC0109

SPECIFICATIONS

Construction	Rigid Polymeric Core
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	7" wide x 53" length
Overall Thickness	5 mm (includes 1 mm Pad)
Wear Layer	20 MIL
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	4-Sided Micro-Beveled
Packaging	26.255 sf/ctn, 40 ctn/plt, 1050.2 sf/plt
Installation	Angle/Angle
Warranty	10 Yr Light Commercial, 10 Yr Multi-Family, 30 Yr Residential

INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 3/16" in 10'
- Floating floors must be allowed to expand and contract with no restrictions

Read Complete Instructions Before Installing



SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE

tascontract.com

