

VISTA TILE



SPC | 5.0 MM, 12 MIL

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class I, Type B, Grade 2, Class B
Dimensions	12" Wide x 24" Long, 300 mm x 600 mm
Overall Thickness	5 mm (includes 1 mm Pad)
Attached Pad	1 mm IXPE Acoustical Pad
Wear Layer	12mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	26.049 sf/carton - 42 carton/pallet - 1094.058 sf/pallet

Installation & Maintenance

Angle / Angle, Float

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor

Test Method & Requirements


Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Flammability/Radiant Flux	ASTM E648	Pass > 250 LBS
Static Load	ASTM F970	Class I
Smoke Density	ASTM E662	Pass

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore Certified

Ortho-Phthalate Free

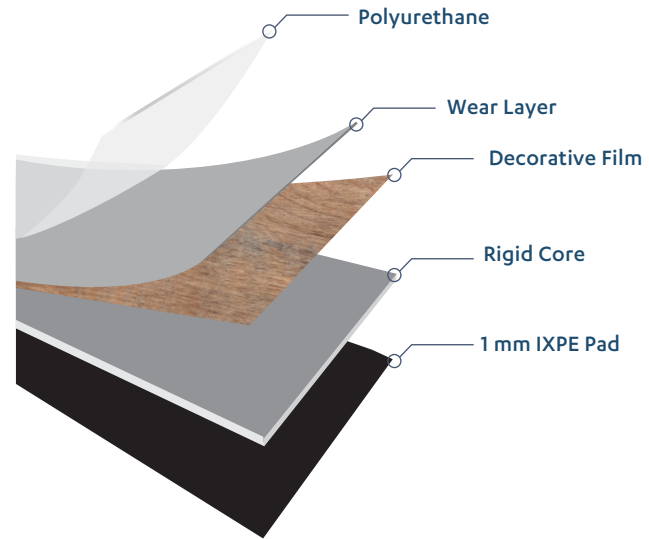

Warranty


5 Year Light Commercial, 5 Year Multi-Family, 25 Year Residential

Accessories


Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

Layout Options:



ASHLAR



STAGGER

