


SPARTA TILE


EVC | 8.0 MM, 20 MIL



Carrara Marble
TPWPDLO423

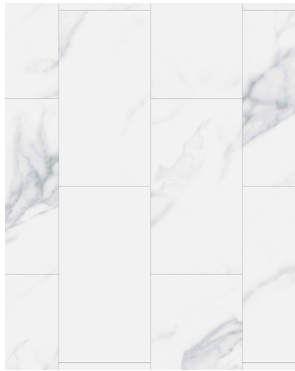

Concrete Marrone
TPWPDLO422

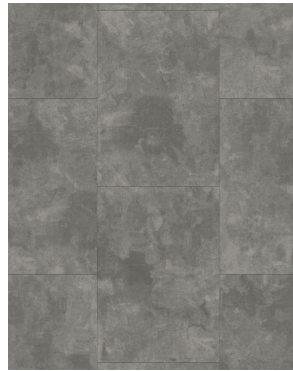

Concrete Stain Naturelle
TPWPDLO421



Italian Stone Crema
TPWPDLO420



Italian Stone Grigio
TPWPDLO419



Limestone Vein Cut
TPWPDLO424



Linear Stone Beige
TPWPO416 *



Linear Stone Grey
TPWPO415 *



Pello Rock Natural
TPWPDLO417



Pello Rock Sandstone
TPWPDLO418

*Non-Stock Colors can be ordered through the Platforms Program.

SPECIFICATIONS

Construction	Premium Engineered Vinyl Core Plank
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	12" Wide x 24" Long
Overall Thickness	8.0 (includes 1.5 mm Premium Pad)
Wear Layer	20 mil
Finish Coat	Anti-Microbial Anti-Scratch
Texture	Embossed
Edge Profile	Painted Bevel
Packaging	19.375 sf/ctn - 66 ctn/ptl - 1278.8 sf/plt
Installation	Angle/Angle
Warranty	10 Yr Commercial, 10 Yr Multi-Family, 30 Yr Residential

INSTALLATION FAST FACTS

- Radiant Heat: Approved (Hydro Systems ONLY)
- Relative Humidity: 30% - 50%
- Acclimation: 24 hrs in carton
- Room Temperature: 70o
- Expansion Space: 1/4" around perimeter
- Use T-Mold in spaces larger than 26' l x 36' w
- Inspect flooring prior to installation
- Use floor protection for furniture

Read Complete Instructions Before Installing



tascontract.com

SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE



Additional specifications, full installation/maintenance and warranty information available online at TASCONTRACT.COM.



TAS supply company, Inc.