



TANDEM WIDE




EVC | 7,5 MM, 20 MIL

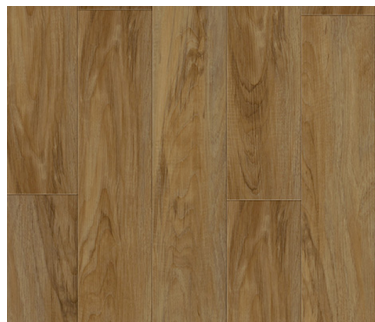


Rye | TPWP0103

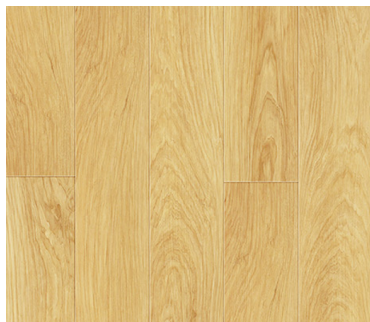


Ardmore | TPWP0104

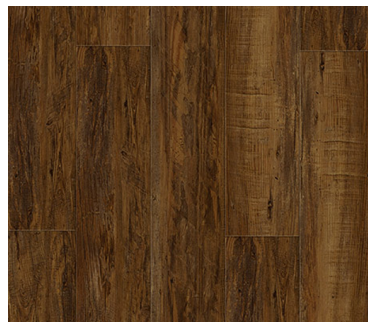


Barnby | TPWP0105

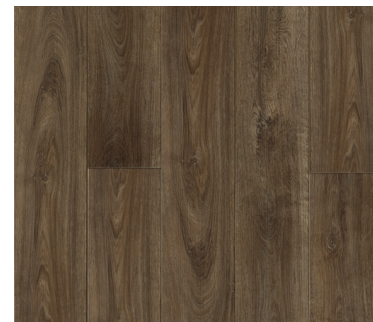

Galway | TPWP0107

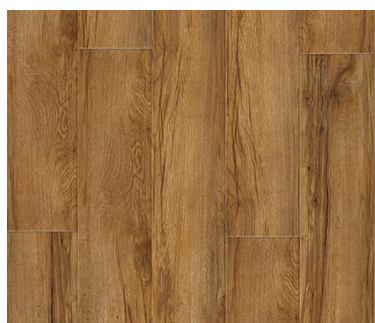

Hazelwood | TPWP0101

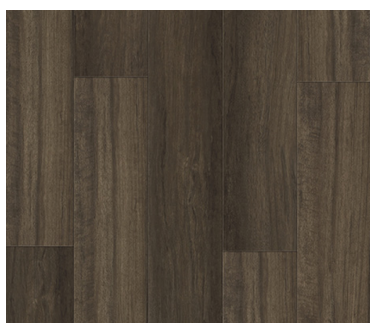

Stirling | TPWP0113 *



Hampton | CH50101795002



Mistley Bay | TPWP0105 *

*Non-Stock Colors

Available through our Platforms Program. Minimum QTY Applies.

SPECIFICATIONS

Construction	Expanded Polymer Core, EVC
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	7" Wide x 48" Long
Overall Thickness	7.5 mm (includes 2 mm Premium Pad)
Wear Layer	20 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	28.365 sf/ctn, 50 ctn/plt, 1418 sf/plt
Installation	Angle/Angle
Warranty	10 Yr Light Commercial, 10 Yr Multi-Family, 30 Yr Residential

INSTALLATION FAST FACTS

- Radiant Heat: Approved (Hydro Systems ONLY)
- Relative Humidity: 30% - 50%
- Acclimation: 24 hrs in carton
- Room Temperature: 70o
- Expansion Space: 1/4" around perimeter
- Use T-Mold in spaces larger than 26' l x 36' w
- Inspect flooring prior to installation
- Use floor protection for furniture

Read Complete Instructions Before Installing



tascontract.com

**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE**

