

GLUE DOWN | 5.0 MM, 20 MIL

Construction	Solid Luxury Vinyl
Classification	ASTM F1700, Class III, Type B
Dimensions	Plank: 7.25" Wide x 48" Long Tile: 12" Wide x 24" Long
Overall Thickness	5.0 mm
Attached Pad	Slip Resistant Backing
Wear Layer	20 mil
Finish Coat	Matte Gloss, Polyurethane R10 Slip Resist Coating
Texture	Embossed
Edge Profile	4-Side Micro Bevel
Packaging	Plank: 24.17 sf/ctn, 50 ctn/plt, 1208.5 sf/plt Tile: 20 sf/ctn, 60 ctn/plt, 1200 sf/plt

Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as WF Taylor Fresh Floors


Recommended Adhesives: - Dynamic, Transitional Pressure Sensitive, firm set
- Pinnacle, Premium Transitional Pressure Sensitive, hard set

Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Slip Resistance	DIN 51130	Angle: 18.7° Rating: R10

Health & Environmental

FloorScore SCS Certified
Phthalate-Free

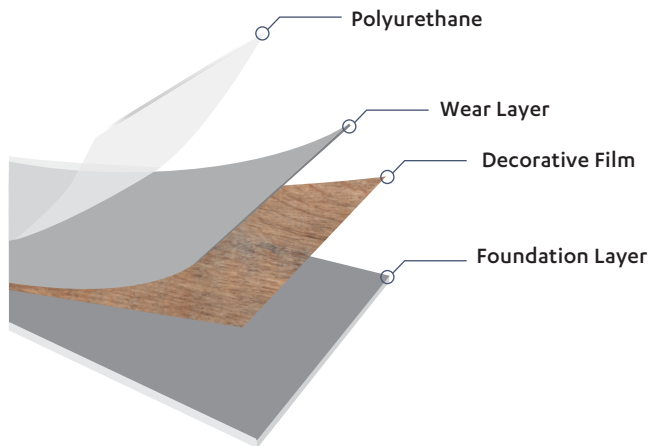

Warranty


15 Yr Light Commercial, 15 Yr Multi-Family, 20 Yr Residential

Accessories


[QNose](#) Stair Nosing

Layout Options:


NOT TO SCALE




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET



ASHLAR



STAGGER

