


CHARISMA

TAS
FLOORING

SPC 4.4 MM, 12 MIL



Conrad | RCRC0402

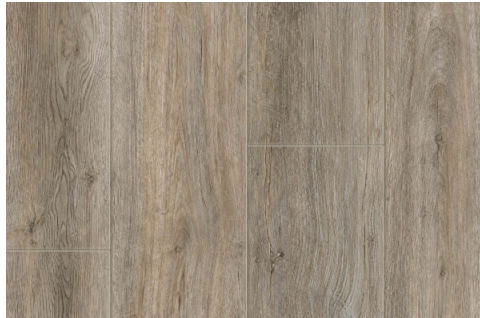

Kent | RCRC0403




Colman | RCRC0404




Vanderbilt | RCRC0405




Emory | RCRC0406

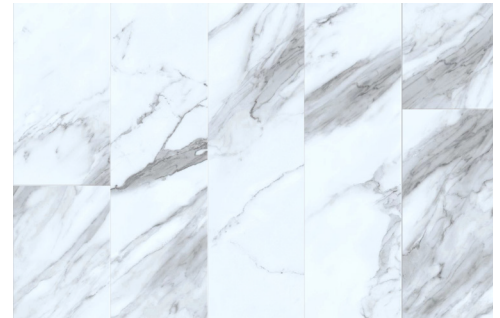

Calcutta Marble | RCRC0407

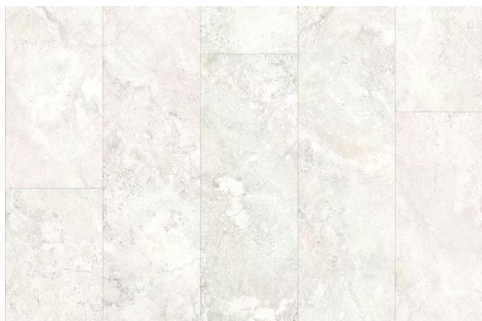

Grey Classic Travertine | RCRC0408

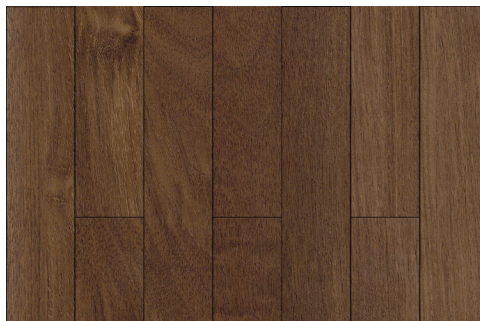

Dartmouth | RCRC0409

SPECIFICATIONS

Construction	SPC, Stone Polymer Composite, Rigid Core
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	6" Wide x 36" Long, 152 mm x 915 mm
Overall Thickness	4.4 mm (includes 1 mm IXPE pad)
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	24 sf/carton - 54 carton/pallet - 1296 sf/pallet
Installation	Angle / Angle, Float
Warranty	5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 3/16" in 10'
- Floating floors must be allowed to expand and contract with no restrictions

Read Complete Instructions Before Installing



tascontract.com

**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE**



SCS Certified



Additional specifications, full installation instructions & warranty information available online at tascontract.com

TAS
CONTRACT

TAS supply company, Inc.