

# COMPLIMENT



SPC 4.5 MM, 8 MIL




**Mimosa** | CTRC0102




**Primrose** | CTRC0103



**Gardenia** | CTRC0106

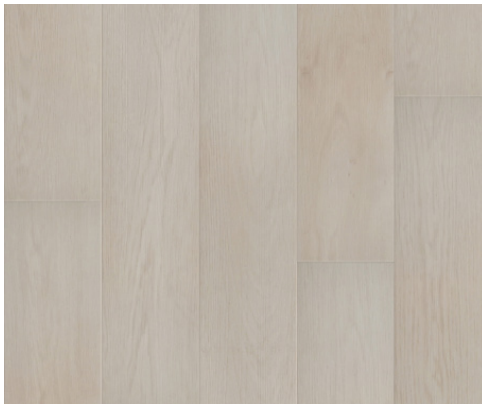

**Camellia** | CTRC0107

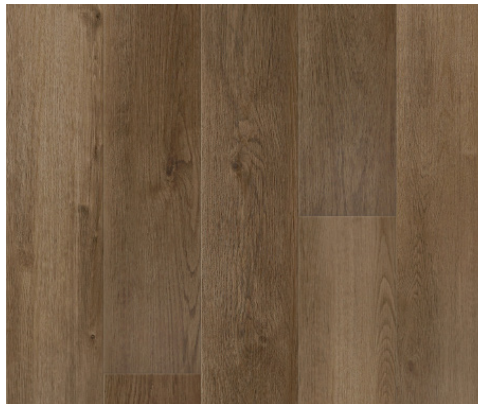

**Sloop** | CTRC0205

## SPECIFICATIONS

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	7" Wide x 48" Long, 183 mm x 1220 mm
Overall Thickness	4.5 mm (includes 1 mm EVA pad)
Wear Layer	8 mil
Finish Coat	Low Gloss, Polyurethane
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	33.648 sf/carton - 50 carton/pallet - 1682.4 sf/pallet
Installation	Angle / Angle, Float
Warranty	5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

## INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 3/16" in 10'
- Floating floors must be allowed to expand and contract with no restrictions

Read Complete Instructions Before Installing



tascontract.com

SPEC SHEET  
WARRANTY  
INSTALLATION & MAINTENANCE  
TRIMS, TRANSITIONS & [QNOSE](#)



SCS Certified

Additional specifications, full installation instructions & warranty information available online at [tascontract.com](https://tascontract.com)



TAS supply company, Inc.