




2.0 MM, 12 MIL

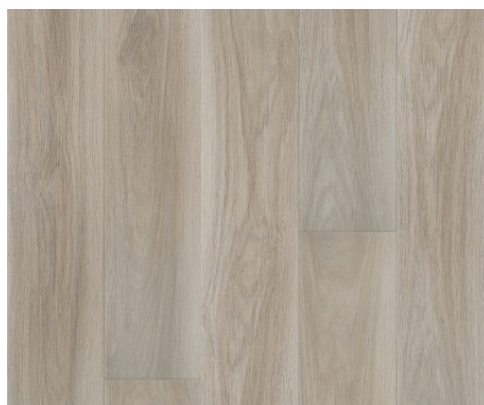


**Mimosa** | CTLV0102

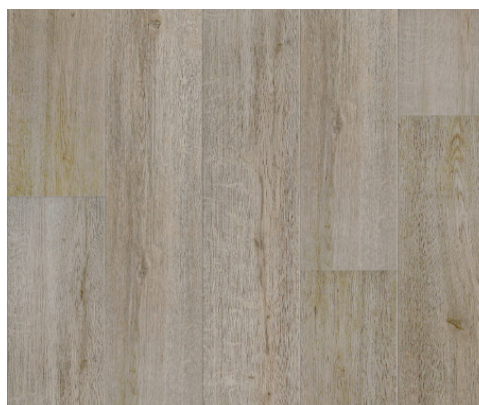

**Primrose** | CTLV0103

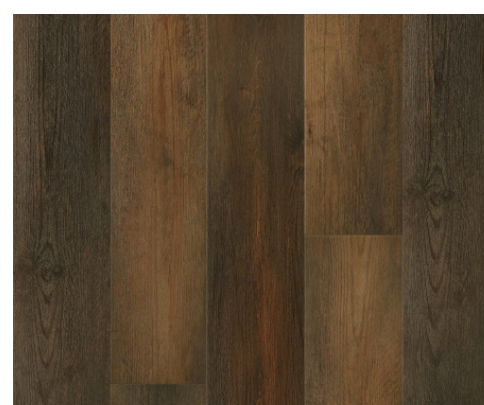


**Aster** | CTLV0104

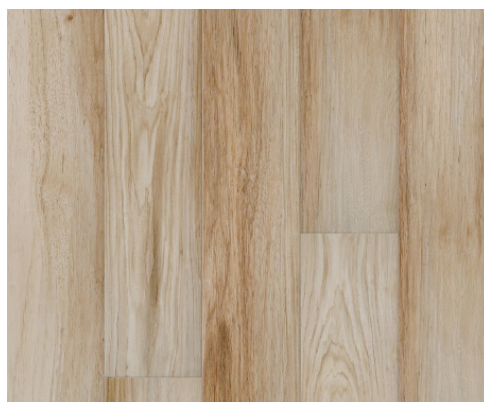

**Dahlia** | CTLV0105



**Gardenia** | CTLV0106

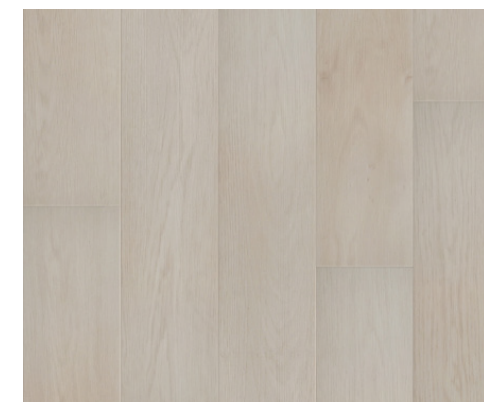

**Camelia** | CTLV0107

## SPECIFICATIONS

Construction	Luxury Vinyl Tile
Classification	ASTM F1700, Class III, Type B
Dimensions	7" Wide x 60" Long, 185 mm x 1524mm
Overall Thickness	2.0 mm
Wear Layer	12 mil
Finish Coat	Ceramic Bead UV Cured Polyurethane
Texture	Low Gloss, Embossed
Edge Profile	Soft Rolled
Packaging	66.76 sf/carton - 40 carton/pallet - 2670.58 sf pallet
Installation	Glue Down
Warranty	5 Yr Light Commercial, 5 Yr Multi-Family, 20 Yr Residential

## INSTALLATION FAST FACTS

- Acclimate to Normal Room Conditions (NRC) 65°F - 85°F
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 60%
- Work out of several boxes, mixing product for visual appearance
- Minimum 3500 PSI for Concrete/Cypcrete Substrates

Read Complete Instructions Before Installing



tascontract.com

**SPEC SHEET  
WARRANTY  
INSTALLATION & MAINTENANCE  
TRIMS, TRANSITIONS & QNOSE**

