

## SPC 5.0 MM, 20 MIL

Construction	SPC, Stone Polymer Composite, Rigid Core
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	9" Wide x 60" Long, 228 mm x 1524mm
Overall Thickness	5 mm (includes 1 mm Pad)
Attached Pad	1 mm IXPE Sound Abatement Pad
Wear Layer	20 mil
Finish Coat	Polyurethane, Low Gloss
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	26.37 sf/ctn, 48 ctn/plt, 1265.76 sf/plt

### Installation & Maintenance

Angle / Angle, Float

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.  
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor

### Test Method & Requirements


Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Flammability/Radiant Flux	ASTM E648	Pass > 250 LBS
Static Load	ASTM F970	Class I
Smoke Density	ASTM E662	Pass

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Health & Environmental

FloorScore Certified #

Phthalate Free

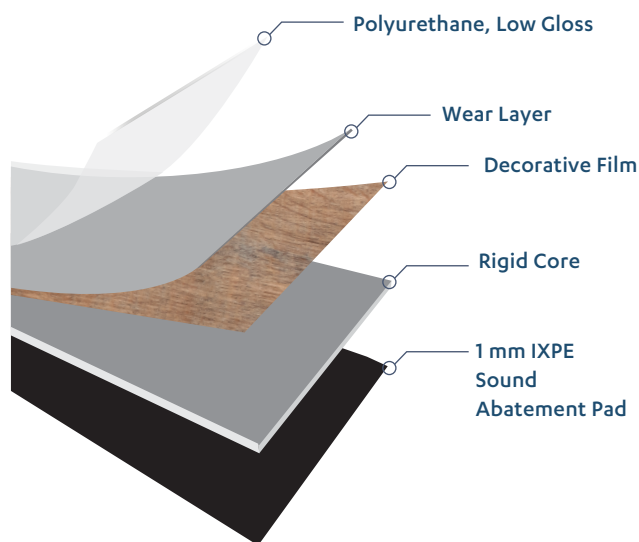

### Warranty

10 Yr Light Commercial, 10 Yr Multi-Family, 30 Yr Residential

### Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

### Layout Options:

