





**Cairns** | NFRCU0208



**Crescent** | NFRCU0204

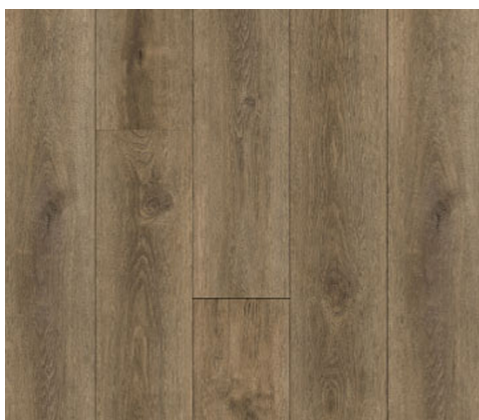


**Cruiser** | NFRCU0203

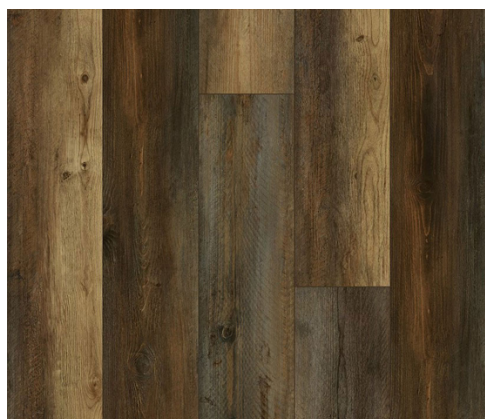

**Wiskey** | NFRCU0205



**Pyramid** | NFRCU0207

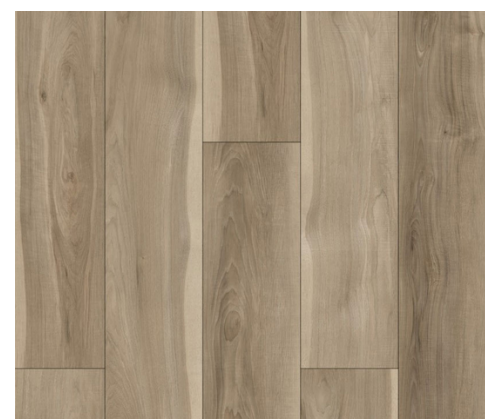

**Ozet** | NFRCU0202

## SPECIFICATIONS

Construction	SPC, Stone Polymer Composite, Rigid Core
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	9" Wide x 60" Long, 228 mm x 1524mm
Overall Thickness	5.0 mm (includes 1 mm pad)
Wear Layer	20 mil
Finish Coat	Polyurethane, Low Gloss
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	26.37 sf/ctn, 48 ctn/plt, 1265.76 sf/plt
Installation	Angle / Angle
Warranty	10 Yr Light Commercial, 10 Yr Multi-Family, 30 Yr Residential

## INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 1/8" in 6'
- Floating floors must be allowed to expand and contract with no restrictions

Read Complete Instructions Before Installing



tascontract.com

**SPEC SHEET  
WARRANTY  
INSTALLATION & MAINTENANCE  
TRIMS, TRANSITIONS & QNOSE**

