



ACCLAIM

ABA 4.5 MM | 12 MIL | 7.25" X 48"

TAS
CONTRACT

[TASCONTRACT.COM](https://tascontract.com)

ACCLAIM

ABA RIGID CORE | 4.5 MM | 12 MIL | 7.25" X 48"



ANTI-MICROBIAL | ANTI-SCRATCH COATING

The Anti-Microbial Polyurethane finish coat gives a >99.9% reduction of bacteria, tested in accordance with ASTM E2180-18.



ABA CONSTRUCTION

The ABA 3-Layered Core construction of Acclaim provides superior dimensional stability in a Rigid Core product.



INDENTATION RESISTANT

Rigid Core products feature a dense, solid core that provides resistance to indentation. Rigid Core flooring solutions address a variety of needs in light commercial and residential spaces.



SOUND ABATEMENT PAD

The attached Premium Acoustical Pad provides sound-dampening properties in addition to the floor/ceiling assembly.



EDGE PROFILE

4-Sided Painted Bevel to enhance plank definition for a realistic wood floor visual.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





TANUNDA HICKROY
ABA RIGID CORE

WIRCO501
4.5 MM | 12 MIL



LAGER HICKORY
ABA RIGID CORE

WIRCO502
4.5 MM | 12 MIL



PORTER HICKORY
ABA RIGID CORE

WIRC0503
4.5 MM | 12 MIL



ERDINGER OAK
ABA RIGID CORE

WIRCO504
4.5 MM | 12 MIL



YEBINNA OAK
ABA RIGID CORE

WIRCO505
4.5 MM | 12 MIL



CALLA ACACIA
ABA RIGID CORE

WIRCO506
4.5 MM | 12 MIL

ABA SPC 4.5 MM, 12 MIL

Construction	ABA Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	7.25" Wide x 48" Long, 183 mm x 1220 mm
Overall Thickness	4.5 mm (includes 1 mm pad)
Attached Pad	1 mm Acoustical Pad
Wear Layer	12 mil
Finish Coat Texture	Anti-Microbial & Anti-Scratch
	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	28.84 sf/carton - 55 cartons/pallet - 1586.2 sf/pallet

Installation & Maintenance

Angle / Angle, Float

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor

Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass>250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	


*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore Certificate # SCS-FS-05909

Hydrophobic Antimicrobial Surfaces ASTM E2180-18 Reduction % >99.9

Phthalate-Free

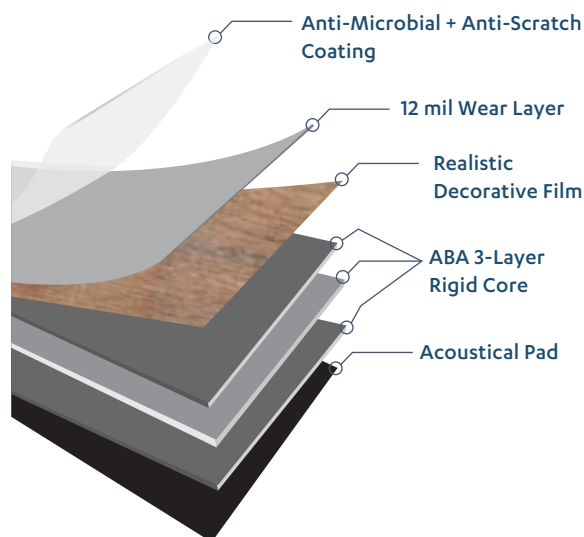

Warranty


5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

Layout Options:

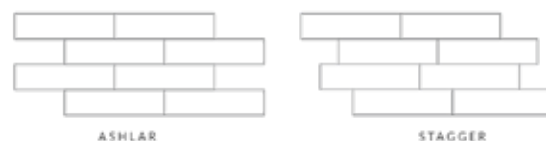



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.