

CRUISER



GLUE DOWN | 2.5 MM, 12 MIL

| | |
|-------------------|---|
| Construction | Solid Luxury Vinyl |
| Classification | ASTMF 1700, Class III, Type B |
| Dimensions | 7" Width x 60" Length |
| Overall Thickness | 2.5 mm |
| Attached Pad | N/A |
| Wear Layer | 12 mil |
| Finish Coat | Ceramic Bead UV Polyurethane |
| Texture | Low Gloss, Embossed |
| Edge Profile | Rolled Edge |
| Packaging | 54.625 sf/carton - 40 cartons/pallet - 2185 sf/pallet |

Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as WF Taylor Fresh Floors

Recommended Adhesives: WF Taylor

- Dynamic, Transitional Pressure Sensitive, firm set
- Pinnacle, Premium Transitional Pressure Sensitive, hard set
- Resolute, Premium Multi-Functional, 100% moisture barrier


Test Method & Requirements

| | | |
|---|------------|------------------|
| Solid Vinyl Floor Tile | ASTM F1700 | Pass |
| Flexibility | ASTM F137 | Pass |
| Thickness | ASTM F386 | Pass |
| Wear Layer Thickness | ASTM F410 | Pass |
| Resistance to Heat Color Change | ASTM F1514 | Pass |
| Resistance to Light Color Change | ASTM F1515 | Pass |
| Residual Indentation | ASTM F1914 | Pass |
| Size & Squareness | ASTM F2199 | Pass |
| Static Coefficient of Friction Polished Surface | ASTM D2047 | Exceeds Standard |
| Static Load Limit | ASTM F970 | Pass > 250 LBS |
| Flammability/Radiant Flux | ASTM E648 | Class I |
| Smoke Density | ASTM E662 | Pass |

Health & Environmental

FloorScore Certified

Phthalate-Free

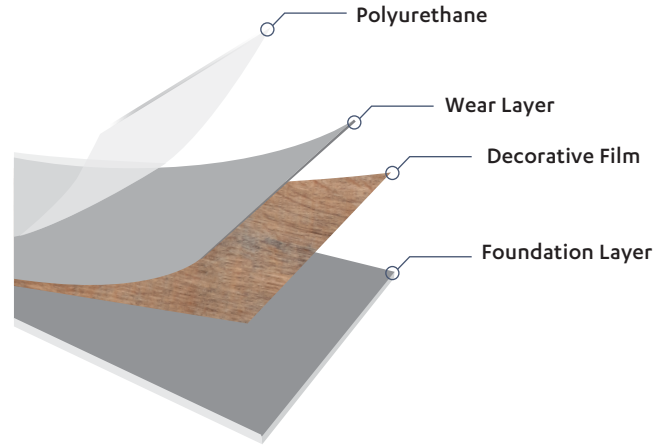

Warranty

5 Yr Light Commercial, 5 Yr Multi-Family, 20 Yr Residential

Accessories

[QNose](#) Stair Nosing

Layout Options:

