

## GLUE DOWN | 2.0 MM, 6 MIL

Construction	Solid Luxury Vinyl
Classification	ASTMF 1700, Class III, Type B
Dimensions	6" Wide x 48" Long
Overall Thickness	2.0 mm
Attached Pad	N/A
Wear Layer	6 mil
Finish Coat	Ceramic Enhanced Polyurethane
Texture	Embossed
Edge Profile	Square Edge
Packaging	54 sf/carton - 48 cartons/pallet - 2592 sf/pallet

### Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as WF Taylor Fresh Floors

Recommended Adhesives: WF Taylor


- Dynamic, Transitional Pressure Sensitive
- Pinnacle, Premium Traditional Pressure Sensitive
- Resolute, Premium Multi-Functional Adhesive

### Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

### Health & Environmental

FloorScore Certified # SCS-FS-05197

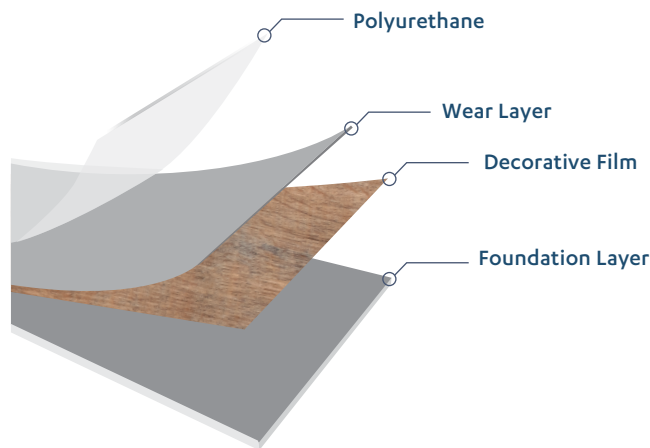


### Warranty

10 Yr Multi-Family, 10 Yr Residential


### Accessories

[QNose](#) Stair Nosing


### Layout Options:



HERRINGBONE



TRIPLE HERRINGBONE



FIVE PLANK PARQUET

