


GLUE DOWN | 2.0 MM, 6 MIL



Bear Mountain | NOLV0403 (NON STOCK)



Eagle Creek | NOLV0406 - (NON STOCK)

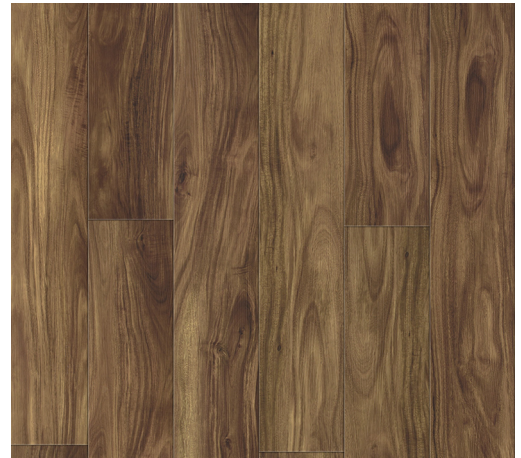

Manoa | NOLV0404 - (NON STOCK)



Pacific Crest | NOLV0402 - (NON STOCK)



Sedona | NOLV0401 - (NON STOCK)



Silver Bay | NOLV0405 - (NON STOCK)

SPECIFICATIONS

Construction	Solid Luxury Vinyl
Classification	ASTMF 1700, Class III, Type B
Dimensions	6" Wide x 48" Long
Overall Thickness	2.0 mm
Wear Layer	6 mil
Finish Coat	Ceramic Enhanced Polyurethane
Texture	Embossed
Edge Profile	4-Sided Square Edge
Packaging	54 sf/carton - 48 cartons/pallet - 2592 sf/palle
Installation	Glue Down
Warranty	10 Yr Multi-Family, 10 Yr Residential

INSTALLATION FAST FACTS

- Acclimate to Normal Room Conditions (NRC) 65°F - 85°F
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 60%
- Work out of several boxes, mixing product for visual appearance
- Minimum 3500 PSI for Concrete/Gypcrete Substrates

Read Complete Instructions Before Installing



SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & [QNOSE](#)

tascontract.com

