




Provost | WIRC0607

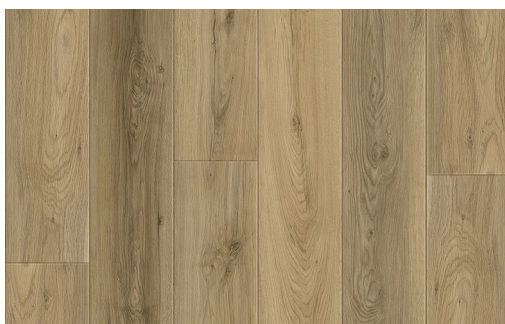

Orion | WIRC0603

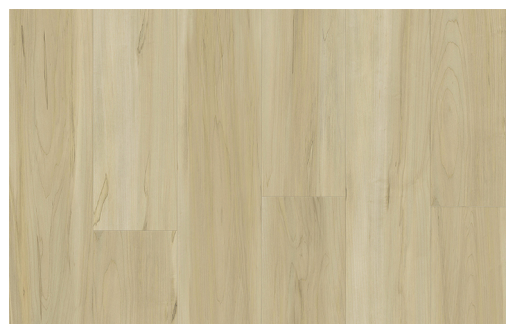


Pedestal | WIRC0604

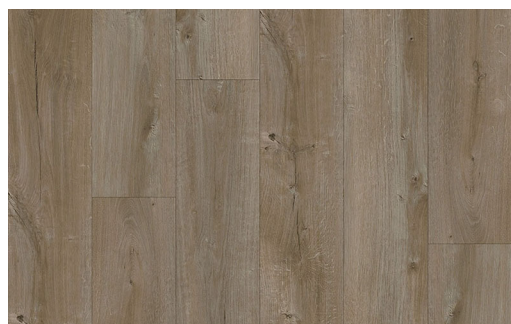


Spectrum | WIRC0606




Thaddeus | WIRC0608

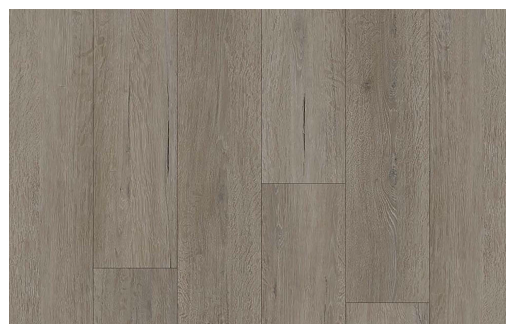

Maestro | WIRC0601

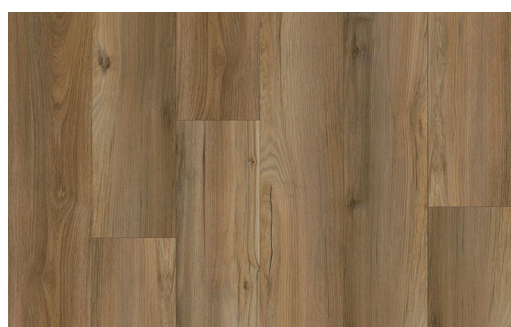

Virtuoso | WIR0605

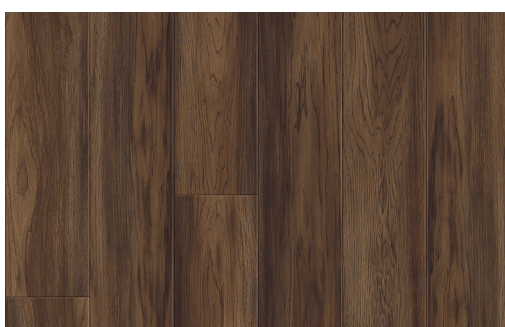

Bacchus | WIRC0602

SPECIFICATIONS

| | |
|-------------------|---|
| Construction | LSPC Hybrid - ABA Foam Rigid Core |
| Classification | ASTM F3261, Class 1, Type B, Grade 1, Class B |
| Dimensions | 7.125" Wide x 60" Long |
| Overall Thickness | 10 mm (includes 2 mm IXPE Pad) |
| Wear Layer | 20 mil |
| Finish Coat | Anti-Microbial Anti-Scratch |
| Texture | Embossed |
| Edge Profile | 4-Sided Painted Bevel |
| Packaging | 23.75 sf/carton - 40 carton/pallet - 950 sf/pallet |
| Installation | Angle / Angle, Float |
| Warranty | 10 Yr Light Commercial, 10 Yr Multi-Family, 30 Yr Residential |

INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 3/16" in 10'
- Floating floors must be allowed to expand and contract with no restrictions

Read Complete Instructions Before Installing



tascontract.com

**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE**

