

LAMINATE | 8.0 MM, 2 MM ATTACHED PAD



Avondale | FXLA0601



Belmont | FXLA0602




Cypress | FXLA0603



Fairwood | FXLA0604



Sequoia | FXLA0605

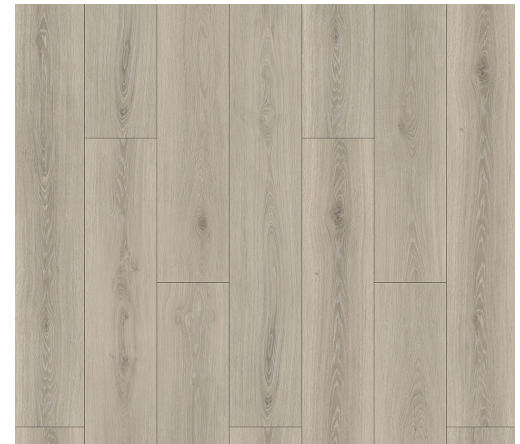

Skyline | FXLA0606

SPECIFICATIONS

Construction	Standard Core Laminate
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	7-3/4" Wide x 48" Long, 195 mm x 1215 mm
Overall Thickness	10 mm (includes 2 mm EVA Pad)
Wear Surface	AC3 Rated
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	20.4 sf/carton - 60 carton/pallet - 1224 sf/pallet
Installation	Angle / Horizontal Tap
Warranty	5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

INSTALLATION FAST FACTS

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimate product to normal room conditions
- Relative Humidity: 35%-55%
- Recommended Room Temp: 60°F-85°F after install
- Transitions required for rooms larger than 25" Length or 35" Width
- Subfloors dry and flat (3/16" in 10')
- Installation on or below grade concrete requires 6 mill moisture barrier

Read Complete Instructions Before Installing



tascontract.com

**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE**

