

LAMINATE | 8.0 MM, 2 MM ATTACHED PAD

Construction	Standard Core Laminate
Classification	EN 13329
Dimensions	7-3/4" Wide x 48" Long, 195 mm x 1215 mm
Overall Thickness	10 mm (includes 2 mm EVA Pad)
Attached Pad	2 mm EVA Pad
Wear Surface	AC3 Wear Rating
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	20.4 sf/carton - 60 carton/pallet - 1224 sf/pallet

Installation & Maintenance

Angle / Horizontal Tap

Transition: Transition required for rooms larger than 25' W x 35' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor

Test Method & Requirements


Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass

Health & Environmental

FloorScore # SCS-FS-07178

CA-Carb Phase II Compliant

GreenGuard Gold # 174782-420

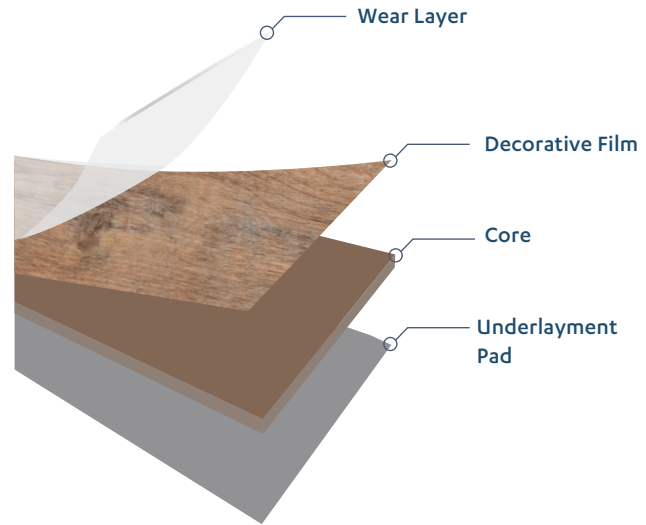

Warranty

5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

Layout Options:

