



ORGANIX

RSPC 5 MM | 22 MIL | 7.25" X 48"

TAS
CONTRACT

[TASCONTRACT.COM](https://tascontract.com)

ORGANIX

RSPC 5 MM | 22 MIL | 7.25" X 48"



INNOVATIVE RICE CORE TO **REDUCE WASTE**

Rice husk, a by-product of rice production, is typically discarded or burned during the rice harvest process which contributes to pollution in already polluted environments. Organix incorporates the husk by-product to reduce the amount of plastics used in the manufacturing of rigid core flooring. Diverting the agricultural waste intern reduces air pollution emissions.



LIGHT WEIGHT **HIGH PERFORMANCE** CORE

Organix is a lighter weight product because of the recycled rice by-product but doesn't sacrifice on stability or durability. Additionally, Organix ships 10% more efficiently which reduces emissions related to logistics



2X STRONGER **LOCKING SYSTEM**

2x stronger locking system than competing products means fewer discarded boards with broken locking joints.



SOUND ABATEMENT PAD

The attached Premium Acoustical Pad provides sound-dampening properties in addition to the floor/ceiling assembly.



reddot winner 2022

MATERIAL AND SURFACES CATEGORY

The **RED DOT AWARD** is the distinction for high design quality.



**DESIGN
AWARD
2022**

Founded in 1953 as Die Gute Industrieform e.V., **IF DESIGN AWARD** has become a global symbol of excellent design.



2022 Finalist, **INTERNATIONAL DESIGN EXCELLENCE AWARDS**. (IDEA)



TOASTED
RSPC RIGID CORE

MJRC0103
5 MM | 22 MIL



RISOTTO
RSPC RIGID CORE

MJRC0101
5 MM | 22 MIL



PORRIDGE
RSPC RIGID CORE

MJRC0106
5 MM | 22 MIL



PAELLA
RSPC RIGID CORE

MJRC0102
5 MM | 22 MIL



CURRY
RSPC RIGID CORE

MJRC0105
5 MM | 22 MIL



ARANCINI
RSPC RIGID CORE

MJRC0104
5 MM | 22 MIL



BASMATI
RSPC RIGID CORE

MJRC0107
5 MM | 22 MIL

RSPC 5.0 MM, 22 MIL

Construction	RSPC, Rice Husk Stone Polymer Composite Core
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimension	7.25" Wide x 48" Long, 181 mm x 1120 mm
Overall Thickness	5.0 mm (Includes 1 mm pad)
Attached Pad	1 mm IXPE Sound Abatement Pad
Wear Layer	22 mil
Finish Coat	Low Gloss, Polyurethane
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	23.79 sf/carton - 50 cartons/pallet - 1189.5 sf/pallet

Installation

Angle / Angle, Drop & Tap, Float

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor

Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness With Pad	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standards
Static Load Limit	ASTM F970	Pass >250 LBS
Flammability/Radiant Flux	ASTM E648	Class 1
Locking Strength	ISO 24334	Exceeds Standards
Determination of Peel Resistance	ISO 24345	Pass
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E429*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental


Recycled Content Agricultural Waste: 20% Rice Husk Byproduct

Phthalate-Free

FloorScore Certified #SCS-FS-08144

GreenGuard Gold #289142-420

LEED: May contribute to LEED credits

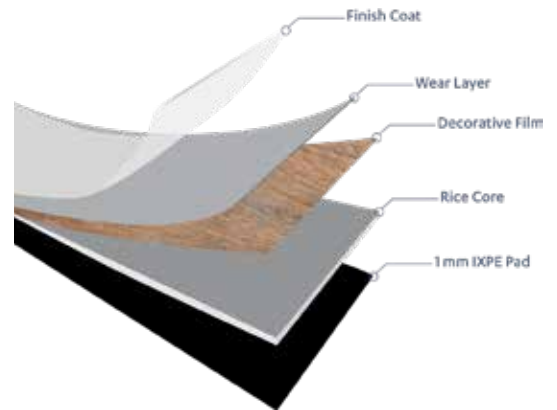

Accolades



reddot winner 2022
Germany



Germany



IDEA Design Award USA

Warranty

10 Yr Light Commercial, 10 Yr Multi-Family, 30 Yr Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

Layout Options:



ASHLAR



STAGGER



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.