



COMPLIMENT

SPC 4.5 MM, 8 MIL

TAS
CONTRACT

[TASCONTRACT.COM](https://tascontract.com)

COMPLIMENT

SPC | 4.5 MM | 8 MIL | 7" X 48"



Compliment SPC matches several colors from the Corsage 2.0 MM and Cruiser 2.5 MM Collections.



PEACE OF MIND **WATERPROOF**

Waterproof core technology protects against spills so this can be installed in most rooms of the home or business.



INDENTATION RESISTANT

Rigid Core products feature a dense, solid core that provides resistance to indentation. Rigid Core flooring solutions address a variety of needs in light commercial and residential spaces.



SOUND ABATEMENT PAD

The attached Premium Acoustical Pad provides sound-dampening properties in addition to the floor/ceiling assembly.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





MIMOSA
SPC RIGID CORE

CTRC0102
4.5 MM | 8 MIL



PRIMROSE
SPC RIGID CORE

CTRC0103
4.5 MM | 8 MIL



GARDENIA
SPC RIGID CORE

CTRC0106
4.5 MM | 8 MIL



CAMELLIA
SPC RIGID CORE

CTRC0107
4.5 MM | 8 MIL



SLOOP
SPC RIGID CORE

CTRC0205
4.5 MM | 8 MIL

SPC 4.5 MM, 8 MIL

| | |
|-------------------|---|
| Construction | SPC Rigid Core, Stone Polymer Composite |
| Classification | ASTM F3261, Class 1, Type B, Grade 1, Class B |
| Dimensions | 7" Wide x 48" Long, 183 mm x 1220 mm |
| Overall Thickness | 4.5 mm (Includes 1 mm EVA pad) |
| Attached Pad | 1 mm EVA Sound Abatement Pad |
| Wear Layer | 8 mil |
| Finish Coat | Low Gloss, Polyurethane |
| Texture | Embossed |
| Edge Profile | 4-Sided Micro Bevel |
| Packaging | 33.648 sf/carton - 50 cartons/pallet - 1682.4 sf/pallet |

Installation & Maintenance

Angle / Angle, Float

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor

Test Method & Requirements


| | | |
|---|------------------|------------------|
| Resilient Floor in Modular Format | ASTM F3261 | Pass |
| Thickness (with Pad) | ASTM F386/ (387) | Pass |
| Wear Layer Thickness | ASTM F410 | Pass |
| Stain/Chemical Resistance | ASTM F925 | Pass |
| Resistance to Heat Color Change | ASTM F1514 | Pass |
| Resistance to Light Color Change | ASTM F1515 | Pass |
| Residual Indentation | ASTM F1914 | Pass |
| Size & Squareness | ASTM F2055 | Pass |
| Dimensional Stability w/Exposure to Heat | ASTM F2199 | Pass |
| Dimensional Stability w/Exposure to Heat | ISO 23999 | Pass |
| Determination of Geometrical Characteristics | ISO 24337 | Pass |
| Static Coefficient of Friction Polished Surface | ASTM D2047 | Exceeds Standard |
| Static Load Limit | ASTM F970 | Pass > 250 LBS |
| Flammability/Radiant Flux | ASTM E648 | Class I |
| Smoke Density | ASTM E662 | Pass |
| Impact Insulation Class IIC | ASTM E492* | |
| Sound Transmission Class STC | ASTM E90* | |

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore Certified # SCS-FS-05005

Phthalate-Free

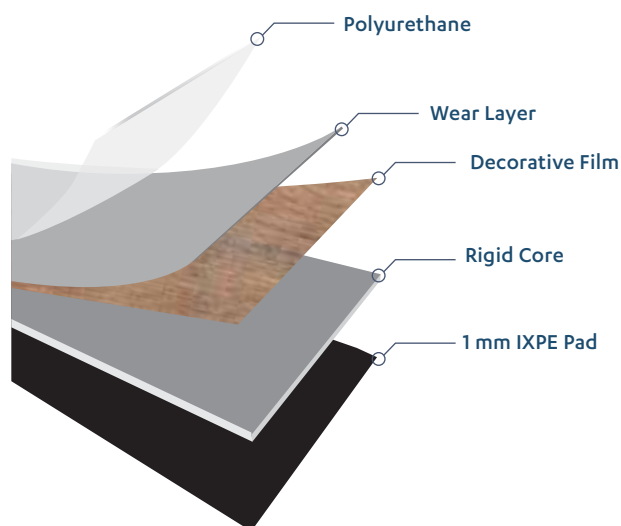

Warranty


5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

Layout Options:

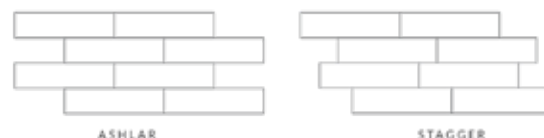



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.