



CORSAGE

GLUE DOWN | 2 MM | 12 MIL | 7" X 60"

TAS
CONTRACT
TASCONTRACT.COM

CORSAGE

GLUE DOWN | 2 MM | 12 MIL | 7" X 60"



ROLLED EDGE TREATMENT

Unique rolled edge for a distinct and authentic wood look.



LONG & WIDE PLANK

Long and wide planks make any room appear larger and creates a clean look.



EMBOSSSED TEXTURE

Wood grain embossing creates a realistic wood texture.



CERAMIC BEAD FINISH COAT

Ceramic bead strengthens a polyurethane system. To increase wear resistance, a fine ceramic powder mixes with the liquid polyurethane, then it's applied to the surface of the flooring.

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





MIMOSA
GLUE DOWN LV

CTLV0102
2.0 MM | 12 MIL



PRIMROSE
GLUE DOWN LV

CTLV0103
2.0 MM | 12 MIL



ASTER
GLUE DOWN LV

CTLV0104
2.0 MM | 12 MIL



CAMELLIA
GLUE DOWN LV

CTLV0107
2 MM | 12 MIL



DAHLIA
GLUE DOWN LV

CTLV0105
2 MM | 12 MIL



GARDENIA
GLUE DOWN LV

CTLV0106
2 MM | 12 MIL

Construction	Luxury Vinyl Tile
Classification	ASTM F1700, Class III, Type B
Dimensions	7" Wide x 60" Long, 185 mm x 1524 mm
Overall Thickness	2.0 mm
Wear Layer	12 mil
Finish Coat	Polyurethane Ceramic Bead
Texture	Low Gloss, Embossed
Edge Profile	Rolled Edge
Packaging	66.76 sf/carton - 40 cartons/pallet - 2670.58 sf/pallet

Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as WF Taylor Fresh Floors

Recommended Adhesives: WF Taylor - Dynamic, Transitional Pressure Sensitive Adhesive
- Pinnacle, Premium Transitional Pressure Sensitive Adhesive
- Resolute, Premium Multi-Functional Adhesive


Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	PASS >250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

Health & Environmental

FloorScore Certified # SCS-EC10.3-2014 v4.0

Phthalate-Free

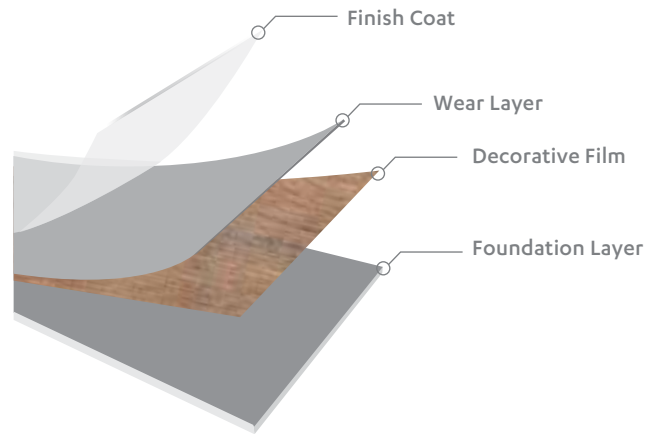

Warranty

5 Yr Light Commercial, 5 Yr Multi-Family, 20 Yr Residential

Accessories


[QNose](#) Stair Nosing

Layout Options:

(not to scale)



HERRINGBONE TRIPLE HERRINGBONE FIVE PLANK PARQUET



ASHLAR STAGGER

Plank size determines the scale of the pattern.



TAS
CONTRACT
TASCONTRACT.COM

PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.