



# CRUISER

GLUE DOWN | 2.5 MM | 12 MIL | 7" X 60"

**TAS**  
CONTRACT

[TASCONTRACT.COM](http://TASCONTRACT.COM)


# CRUISER

GLUE DOWN | 2.5 MM | 12 MIL | 7" X 60"



## ROLLED EDGE TREATMENT

Unique rolled edge for a distinct and authentic wood look.



## LONG & WIDE PLANK

Long and wide planks make any room appear larger and creates a clean look.



## EMBOSSSED TEXTURE

Wood grain embossing creates a realistic wood texture.



## CERAMIC BEAD FINISH COAT

Ceramic bead strengthens a polyurethane system. To increase wear resistance, a fine ceramic powder mixes with the liquid polyurethane, then it's applied to the surface of the flooring.

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.







**YACHT**  
GLUE DOWN LV

CTLV0201  
2.5 MM | 12 MIL



**CLIPPER**  
GLUE DOWN LV

CTLV0202  
2.5 MM | 12 MIL





**CATAMARAN**  
GLUE DOWN LV

CTLV0203  
2.5 MM | 12 MIL





**SLOOP**  
GLUE DOWN LV

CTLV0205  
2.5 MM | 12 MIL



**SKIPJACK**  
GLUE DOWN LV

CTLV0206  
2.5 MM | 12 MIL





**MONITOR**  
GLUE DOWN LV

CTLV0207  
2.5 MM | 12 MIL



# CRUISER



GLUE DOWN | 2.5 MM, 12 MIL

Construction	Solid Luxury Vinyl
Classification	ASTMF 1700, Class III, Type B
Dimensions	7" Width x 60" Length
Overall Thickness	2.5 mm
Attached Pad	N/A
Wear Layer	12 mil
Finish Coat	Ceramic Bead UV Polyurethane
Texture	Low Gloss, Embossed
Edge Profile	Rolled Edge
Packaging	54.625 sf/carton - 40 cartons/pallet - 2185 sf/pallet

## Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as WF Taylor Fresh Floors


Recommended Adhesives: WF Taylor - Dynamic, Transitional Pressure Sensitive, firm set  
 - Pinnacle, Premium Transitional Pressure Sensitive, hard set  
 - Resolute, Premium Multi-Functional, 100% moisture barrier

## Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

## Health & Environmental

FloorScore Certified  
 Phthalate-Free

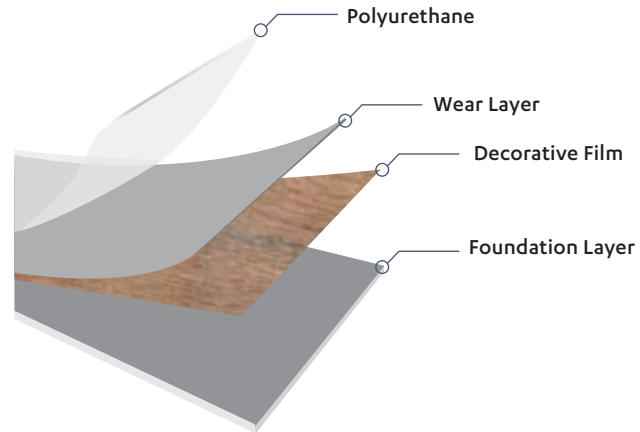

## Warranty


5 Yr Light Commercial, 5 Yr Multi-Family, 20 Yr Residential

## Accessories


[QNose](#) Stair Nosing

## Layout Options:


NOT TO SCALE




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET



ASHLAR



STAGGER



Additional specifications, full installation instructions & warranty information available online at [TASCONTRACT.COM](https://TASCONTRACT.COM)

A division of [TAS](#) supply company, inc.

TAS  
CONTRACT  
TASCONTRACT.COM



PLATFORMS  
LUXURY VINYL



Scan the QR Code to view Platforms, our  
TAS Contract custom flooring program.