



# LIFEPROTECT

LAMINATE | 8.0 MM, PLUS 2.0 MM PAD

**TAS**  
CONTRACT

[TASCONTRACT.COM](https://tascontract.com)

# LIFEPROTECT

LAMINATE | 8.0 MM, 2.0 MM ATTACHED PAD



## LAMINATE CONSTRUCTION

The Oak and Maple trees used in the production of Life Protect's HDF cores are sustainably sourced in the USA. It's PVC-Free, Green Guard Gold certified, and provides an 80-hour water-resistant core.




## INDENTATION RESISTANT

With an AC4 wear rating, LifeProtect delivers a durable, scratch and indention-resistant floor.



## EDGE PROFILE

4-Sided Painted Bevel to enhance plank definition for a realistic wood floor visual.



## LOCKING SYSTEM

This Angle-Tap locking system is glueless watertight and has hydrophobic coated edges.



## SOUND ABATEMENT PAD

The attached Premium Acoustical Pad provides sound-dampening properties in addition to the floor/ceiling assembly.

## TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

45 ft x 45 ft no transitions are required

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





**BUTTERMILK OAK**  
LAMINATE

UMLI22081  
8.0 MM | 2.0 MM PAD





**MONARCH OAK**  
LAMINATE

UMLI22082  
8.0 MM | 2.0 MM PAD



**GOLD CREEK**  
LAMINATE

UMLI22084  
8.0 MM | 2.0 MM PAD





**YELLOWSTONE**  
LAMINATE

UMLI22085  
8.0 MM | 2.0 MM PAD



**MILLER LAKE**  
LAMINATE

UM162542204  
8.0 MM | 2.0 MM PAD



**SAUBLE BEACH**  
LAMINATE

UM162542205  
8.0 MM | 2.0 MM PAD





**SIMCOE**  
LAMINATE

UM162542207  
8.0 MM | 2.0 MM PAD



**OBERLIN**  
LAMINATE

UM162542208  
8.0 MM | 2.0 MM PAD



## LAMINATE | 8.0 MM, 2.0 MM ATTACHED PAD

Construction	Water Resistant Laminate Core
Classification	EN 13329
Dimensions	8-1/32" Wide x 47-5/8" Long
Overall Thickness	10 mm (includes 2 mm pad)
Attached Pad	2 mm XPS Acoustical Pad
Wear Surface	AC4
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	18.6 sf/carton - 68 cartons/pallet - 1264.8 sf/pallet 18.6 sf/carton - 72 cartons/pallet - 1339.2 sf/pallet

### Installation & Maintenance

Angle / Horizontal Tap

Transition: Transition required for rooms larger than 45' W x 45' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor

### Test Method & Requirements


Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Health & Environmental

GreenGuard Gold # 232523-420

CARB Phase 2 Compliant

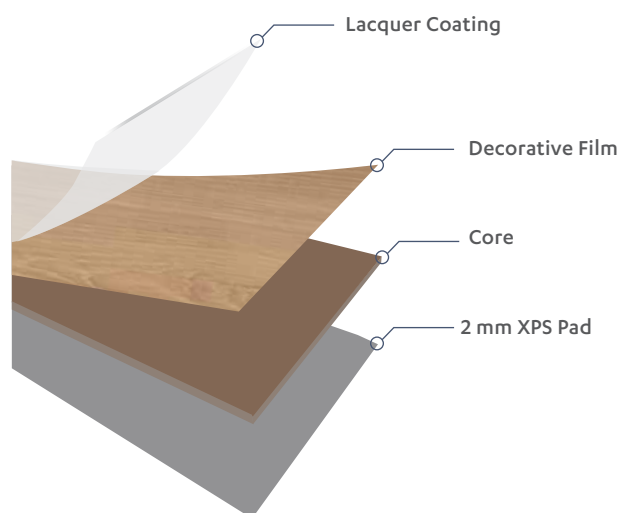

### Warranty


10 Yr Light Commercial, 10 Yr Multi-Family, Lifetime Residential

### Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

### Layout Options:

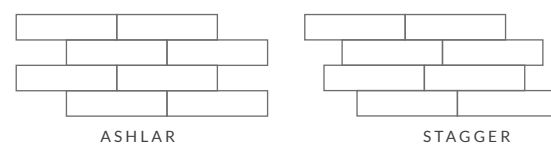

PLATFORMS  
LUXURY VINYL



Scan the QR Code to view Platforms, our  
TAS Contract custom flooring program.