



PLITEQ TREAD™

ATHLETIC, SPORTS & COMMERCIAL
RUBBER FLOORING



PLITEQ®

Distributed by

TAS

CONTRACT



PLITEQ TREAD™

Product Features

TREAD is a multipurpose rubber flooring product line made from up to 92% recycled rubber and EPDM.

TREAD flooring can be used for both indoor and outdoor activities and can be used in commercial, industrial, hospitality, and warehouse applications. **TREAD** products provide an odour-free environment, superior resistance to heat, abrasion, aging and slip, and create an eco-friendly application qualifying for LEED® points.



SPORTS AND FITNESS



EDUCATION



COMMERCIAL



INDUSTRIAL



HOSPITALITY


BENEFITS

- Mold, bacteria, fungi, and water resistant
- Qualifies for LEED® points
- Can be used directly over concrete, screed, wood, rubber or any suitable subfloor construction
- Engineered for high traffic areas
- Easy to install
- Customizable colors and roll lengths available
- Low maintenance surface leads to lower life expectancy costs
- Will not harden or become brittle with age
- Immediate shipping available



PLITEQ TREAD™ OVERVIEW

TREAD GRIP 8

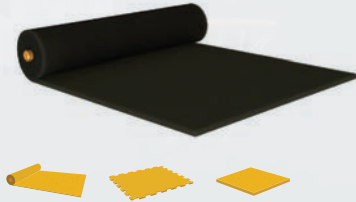


APPLICATIONS

Fitness centers	Factories and Warehouses
Locker rooms	Schools
Pathways and corridors	Garage
Club houses	Animal Care
Restaurants	Arenas

Choose any EPDM color as your floor finishing, see page 6 and 7.

TREAD CUSHION 8

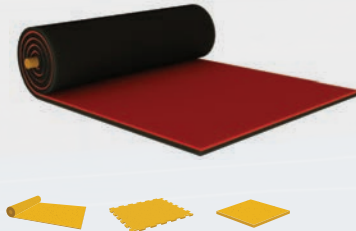


APPLICATIONS

Gymnasiums, fitness, yoga and spin studios	Water parks and swimming pool areas
Multipurpose sports floors	Hospitality
Playground walkways	Winter Sports
Daycares	Indoor and outdoor track

Choose any EPDM color as your floor finish, see pages 6 and 7.

TREAD CUSHION 30



APPLICATIONS

Gymnasiums, fitness, yoga and spin studios	Winter Sports
Weightlifting areas	Rooftops
Schools	Recreational areas
Daycares	Training facilities

Choose any EPDM color as your floor finish, see pages 6 and 7.

CUSTOMIZATION


Customizing a space with logos, court markings or bootcamp style designs can be just as important as the color of the floor.

These designs can either be waterjet cut in or painted on with a highly durable, flexible paint engineered for this purpose.




PLITEQ TREAD™ COLORS

Choose from our selection of 23 EPDM colors, then blend them together to create a unique flooring pattern for your project. Product colors may vary.

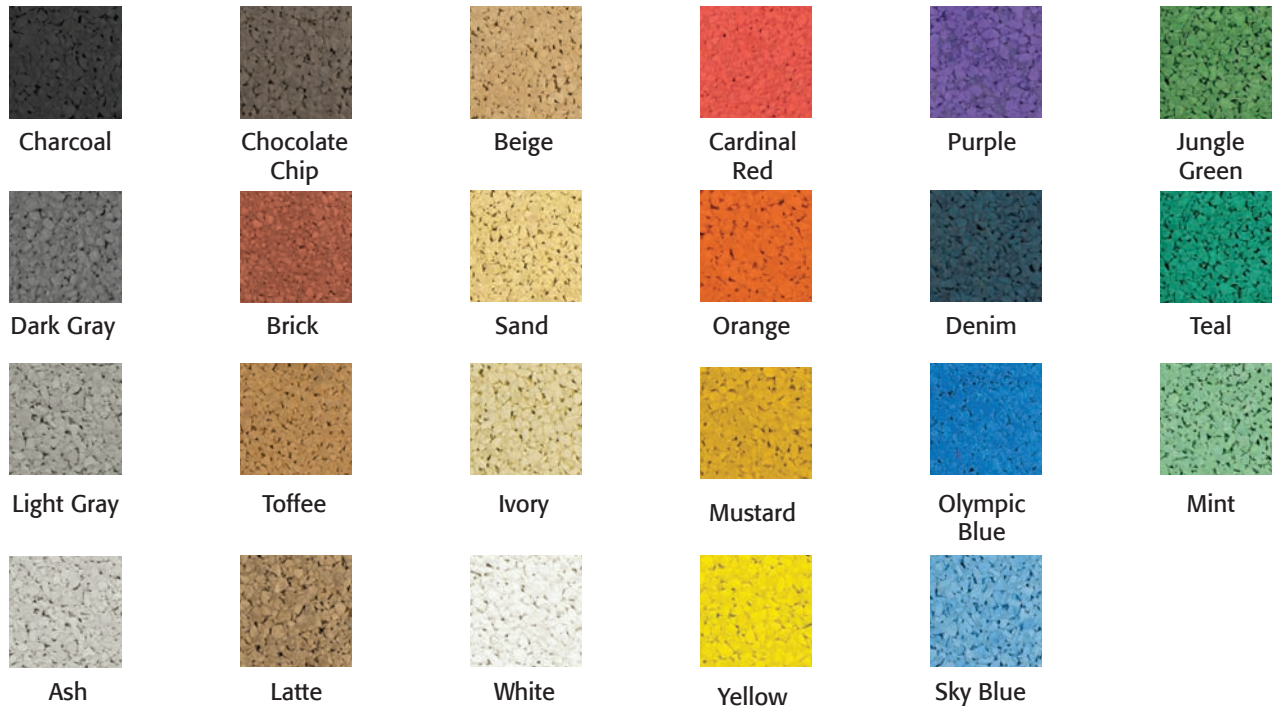


Pliteq TREAD Color Blends are a collection of premixed options that offer visual impact to a range of applications. Product colors may vary.

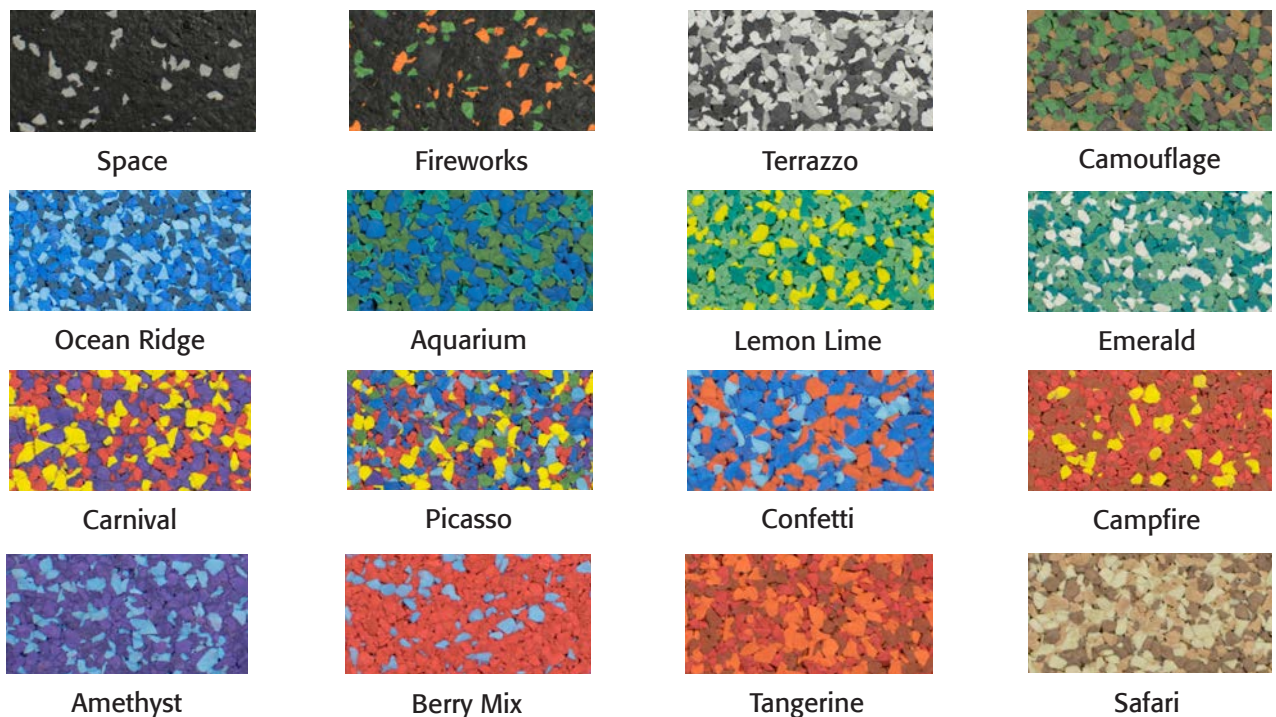


Pliteq TREAD™ Express Colors are a collection of seven colors offered with 15% speckle. Immediate shipping is available. Product colors may vary.




Black




Cardinal Red




Olympic Blue




White



Olympic Blue and White



Jungle Green



Beige

Pliteq TREAD products are available in a wide range of EPDM content percentages. Examples of content percentages are shown here. Product colors may vary.




0%




5%




10%




15%




20%



30%



50%



70%



100%



PLITEQ TREAD™

PLITEQ® 7


PLITEQ TREAD™ GRIP AND CUSHION PRODUCT OVERVIEW

TEST TYPE (ASTM)	ASTM	TEST RESULT
Wear Hardness	DIN 53577	Approximately 4.0 MPa
Abrasion	DIN 53516	Maximum 0.012 in ³
Tensile Strength	EN ISO 1798	Approximately 217.6 psi
Fire Resistance	DIN EN 13501-1	E _n (B2)
Light Fastness	DIN EN 105-B02:1999-09	2-3
Electrostatic Properties	DIN EN 1815:1995-06	0.5 kV
Remaining Deformation	EN 433:1994-11	0.005 in
Use With Wheel Chairs	DIN EN 1307:1997-06	For permanent use adapted
Coefficient of Friction	D1894-95	Wet 1.20 / Dry 1.20
Flame Spread	E84	135
Elongation at Break	D412	85-125%
Smoke Density	E84	<450
Shore Hardness	D2240	60 +/- 5
Compression Set	D395	12% or less
Density	D729	60.2 lb/ft ³
Tear	D624	995 PPI - Die C
Taber Abrasion	C501	0.45
Chemical Resistance	F925-02	No Change
Tensile	D412	1723 kPa

PRODUCT SIZES

TREAD GRIP 8	Rollgood	Square Tile	Puzzle Tile
THICKNESS*	0.31 in	0.31 in	0.31 in
DIMENSIONS	3.9 ft x 29.9 ft	2 ft x 2 ft	2.1 ft x 2.1 ft
WEIGHT	169.8 lb	6.9 lb	7 lb
AREA	98.2 ft ²	4 ft ²	4.1 ft ²
TREAD CUSHION 8	Rollgood	Square Tile	Puzzle Tile
THICKNESS*	0.31 in	0.31 in	0.31 in
DIMENSIONS	3.9 ft x 24.9 ft	2 ft x 2 ft	2.1 ft x 2.1 ft
WEIGHT	154.3 lb	6.3 lb	6.4 lb
AREA	98.2 ft ²	4 ft ²	4.1 ft ²
TREAD CUSHION 30	Square Tile		
THICKNESS*	1.2 in		
DIMENSIONS	2 ft x 2 ft		
WEIGHT	16.1 lb		
AREA	4 m ²		

* Additional thicknesses available upon request. Dimensions, weight, and area may change with different thicknesses.

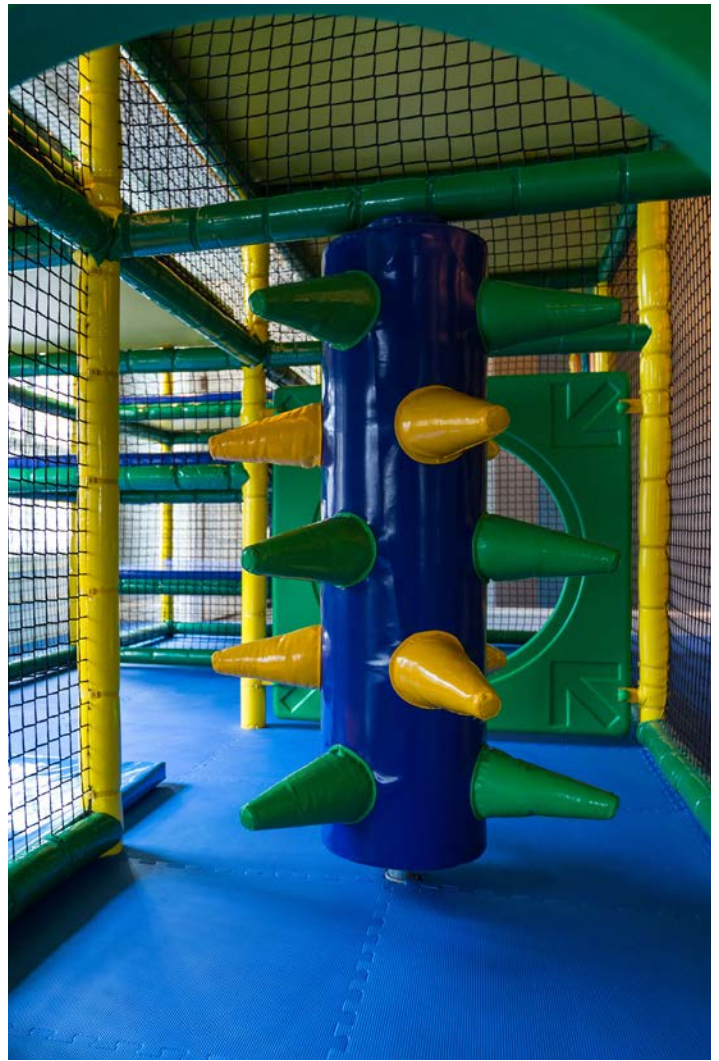



PRODUCT APPLICATIONS

Pliteq TREAD™ products can be used for both indoor and outdoor activities and can be used in commercial, industrial, educational, hospitality, warehouse applications such as multipurpose sports buildings, running tracks, play areas, swimming pool areas, locker rooms, rehabilitation centers, classrooms, pet friendly spaces, fitness centers, daycares, schools, rooftops and patios.







CONTACT US

Pliteq Inc.

For more information: E. info@pliteq.com

PLITEQ INC.

131 Royal Group Crescent
Vaughan, ON
L4H 1X9 Canada

T. + 1 416 449 0049
F. + 1 416 849 0415

PLITEQ (UK) LTD.

Compass House
Vision Park, Chivers Ways
Histon, Cambridge
CB24 9AD

T. + 44 1223 257770
F. + 44 1223 25780

PLITEQ BUILDING MATERIALS TRADING LLC.

European Business Centre
Dubai Investment Park
PO Box 473 512
Dubai, UAE

T. + 971 4 813 5501

PLITEQ ASIA PACIFIC PTE LTD.

#03-20/21, 195 Pearl's Hill Terrace
Chinatown, Singapore
168976

T. +65 8452 6865

www.tread.pliteq.com

