



# EXPLORER

GLUE DOWN | 5.0 MM, 20 MIL

**TAS**  
CONTRACT

[TASCONTRACT.COM](http://TASCONTRACT.COM)

# EXPLORER

GLUE DOWN | 5.0 MM | 20 MIL | 7" X 48"




## MINIMAL TRANSITION

Explorer's 5mm overall thickness allows for minimal transitions to carpet and tile.



## CERAMIC ENHANCED COATING

High-density polyurethane with an enhanced ceramic coating to provide scratch resistance 20 mil commercial wear layer.



## NON-SLIP BACKING

20 mil wear layer provides a long lasting and durable wear resistance. Suitable for light commercial and residential applications.

Q Nose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.



Residential Only





**CLARK**  
SPC RIGID CORE

DJLV0302  
5.0 MM | 20 MIL



**COLOMBUS**  
SPC RIGID CORE

DJLV0301  
5.0 MM | 20 MIL





**DRAKE**  
SPC RIGID CORE

DJLV0303  
5.0 MM | 20 MIL





**COOK**  
SPC RIGID CORE

DJLV0309  
5.0 MM | 20 MIL



**PIKE**  
SPC RIGID CORE

DJLV0304  
5.0 MM | 20 MIL



**SHACKLETON**  
SPC RIGID CORE

DJLV0308  
5.0 MM | 20 MIL



# EXPLORER



GLUE DOWN | 5.0 MM, 20 MIL

Construction	Solid Luxury Vinyl
Classification	ASTMF 1700, Class III, Type B
Dimensions	7" Wide x 48" Length, 177.8 mm x 1219.2 mm
Overall Thickness	5.0 mm (includes Rubber Back)
Attached Pad	No Skid Acoustical Rubber Back
Wear Layer	20 mil
Finish Coat	High Density Polyurethane with Enhanced Ceramic Coating
Texture	Embossed
Edge Profile	4-Sided Square Edges
Packaging	23.35 sf/carton, 50 carton/pallet, 1167.5 sf/pallet

## Installation & Maintenance

Glue Down, Loose Lay (Residential Only)

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as WF Taylor Fresh Floors

Recommended Adhesives: WF Taylor - Dynamic, Transitional Pressure Sensitive  
- Pinnacle, Premium Traditional Pressure Sensitive  
- Resolute, Premium Multi-Functional Adhesive


## Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

## Health & Environmental

FloorScore Certified # SCS-FS-05749

Phthalate Free

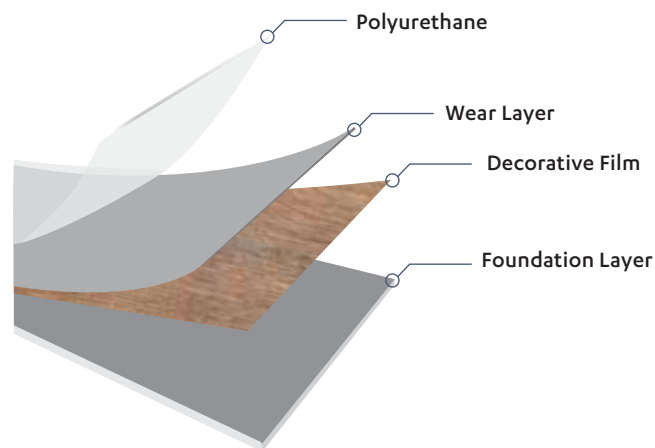


## Warranty

15 Year Light Commercial, 15 Year Multi-Family,  
Limited Lifetime Residential

## Accessories

[QNose](#) Stair Nosing

## Layout Options:

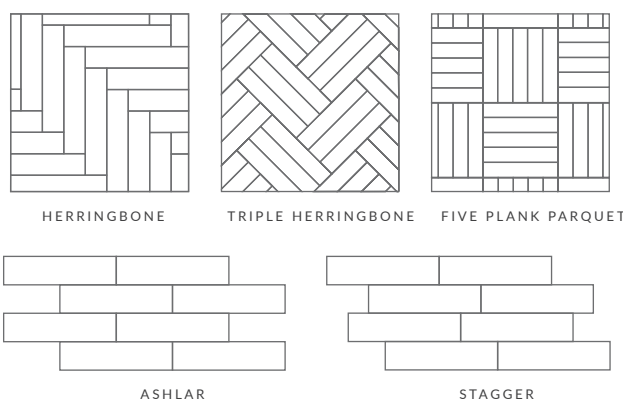



PLATFORMS  
LUXURY VINYL



Scan the QR Code to view Platforms, our  
TAS Contract custom flooring program.