

# RESONATE

SPC 5.0 MM, 20 MIL



**Ash** | SCRC0201



**Craft Oak** | SCRC0202




**Hickory** | SCRC0203




**Vernessa Oak** | SCRC0204



**Remmy Oak** | SCRC0205

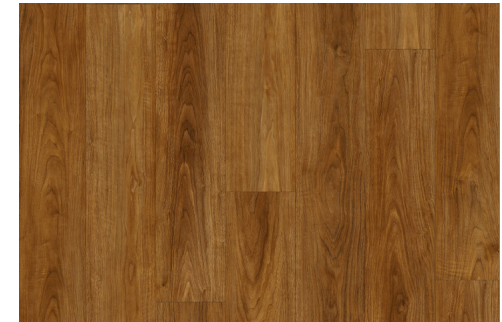

**Walnut** | SCRC0206

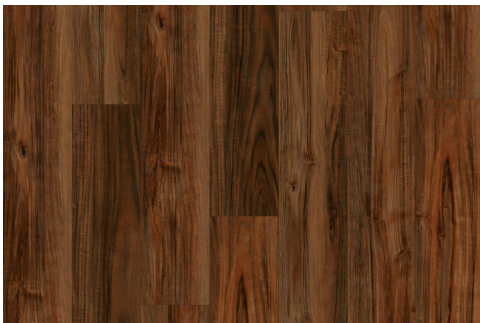

**Acacia** | SCRC0207



**Warm Oak** | SCRC0208

## SPECIFICATIONS

Construction	SPC, Stone Polymer Composite, Rigid Core
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	7" Wide X 48" Long
Overall Thickness	5.0 mm (Includes 1 mm IXPE pad)
Wear Layer	20 MIL
Finish Coat	Low Gloss, Polyurethane
Texture	Smooth
Edge Profile	4-Sided Painted Bevel
Packaging	18.88 sf/ctn, 65 ctn/plt, 1227.2 sf/plt
Installation	Angle/Angle
Warranty	10 Yr Light Commercial, 10 Yr Multi-Family, 30 Yr Residential

## INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 3/16" in 10'
- Floating floors must be allowed to expand and contract with no restrictions

Read Complete Instructions Before Installing



**SPEC SHEET**  
**WARRANTY**  
**INSTALLATION & MAINTENANCE**  
**TRIMS, TRANSITIONS & QNOSE**

[tascontract.com](http://tascontract.com)



SCS Certified



Additional specifications, full installation instructions & warranty information available online at [tascontract.com](http://tascontract.com)