



WINGS

SPC | 4.2 MM | 20 MIL | 7" X 48"

TAS
CONTRACT
TASCONTRACT.COM

WINGS

SPC | 4.2 MM | 20 MIL | 7" X 48"



SPC CONSTRUCTION

The Wings Collection combines durability, comfort, waterproof technology, realistic wood visuals, and beautiful yet high-performing Rigid Core flooring.



INDENTATION RESISTANT

Rigid Core products feature a dense, solid core that provides resistance to indentation. Rigid Core flooring solutions address a variety of needs in light commercial and residential spaces.



SOUND ABATEMENT PAD

The attached Premium Acoustical Pad provides sound-dampening properties in addition to the floor/ceiling assembly.



EDGE PROFILE

The 4-sided Micro-Bevel edges enhance plank definition creating a realistic wood visual.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





CAMBER
SPC RIGID CORE

NFRCU0302
4.2 MM | 20 MIL



LIFT
SPC RIGID CORE

NFRCU0305
4.2 MM | 20 MIL



MAGNETO
SPC RIGID CORE

NFRCU0304
4.2 MM | 20 MIL



O.A.T.
SPC RIGID CORE

NFRCU0301
4.2 MM | 20 MIL



AXIS
SPC RIGID CORE

NFRCU0306
4.2 MM | 20 MIL



THRUST
SPC RIGID CORE

NFRCU0307
4.2 MM | 20 MIL

SPC 4.2 MM, 20 MIL

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	7" Wide x 48" Long, 182 mm x 1220 mm
Overall Thickness	4.2 mm (Includes 1 mm pad)
Attached Pad	1 mm IXPE Sound Abatement Pad
Wear Layer	20 mil
Finish Coat	Low Gloss, Polyurethane
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	33.476 sf/carton - 45 cartons/pallet - 1506.4 sf/pallet

Installation & Maintenance

Angle / Angle, Float

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor

Test Method & Requirements


Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore Certified # SCS-FS-06642

Phthalate-Free

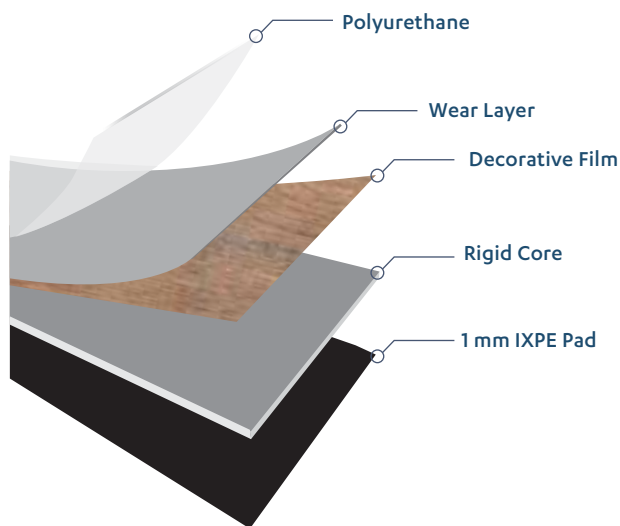

Warranty


5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

Layout Options:

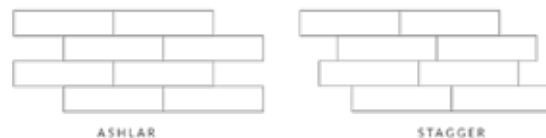

TAS
CONTRACT

TASCONTRACT.COM



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.