

SPECMASTER 2.0 MM




GLUE DOWN | 2.0 MM, 12 MIL



Norwood | CTLV0501



Sheridan | CTLV0502

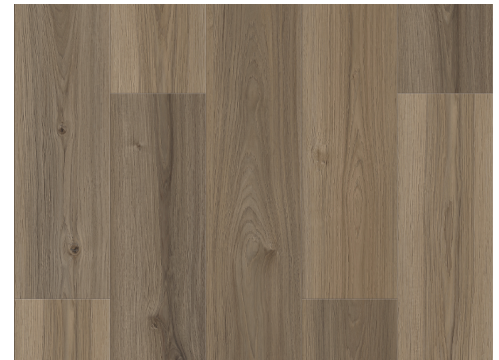

Albany | CTLV0503



Ashland | CTLV0504



Hillside | CTLV0505



Stonebrook | CTLV0506

SPECIFICATIONS

Construction	Solid Luxury Vinyl
Classification	ASTM F 1700, Class III, Type B
Dimensions	7.25" Wide X 48" Long
Overall Thickness	2.0 mm
Wear Layer	12 mil
Finish Coat	Low Gloss, UV Ceramic
Texture	Embossed
Edge Profile	Rolled Edges
Packaging	58.74 sf/ctn, 45 ctn/plt, 2643 sf/plt
Installation	Glue Down
Warranty	10 Yr Light Commercial, 10 Yr Multi-Family, 25 Yr Residential

INSTALLATION FAST FACTS

- Acclimate to Normal Room Conditions (NRC) 65°F - 85°F
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 60%
- Work out of several boxes, mixing product for visual appearance
- Minimum 3500 PSI for Concrete/Gypcrete Substrates

Read Complete Instructions Before Installing



SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
[QNOSE](#)

tascontract.com



Additional specifications, full installation/maintenance and warranty information available online at TASCONTRACT.COM.



TAS supply company, Inc.