



# SPARTA | TILE

EVC | 8.0 MM, 20 MIL

**TAS**  
CONTRACT  
[TASCONTRACT.COM](http://TASCONTRACT.COM)

# SPARTA | TILE

EVC | 8.0 MM, 20 MIL | 12" X 24"



## ANTI-MICROBIAL COATING

The Anti-Microbial Polyurethane finish coat gives a >99.9% reduction of bacteria, tested in accordance with ASTM E2180-18.



## DURRABLE WEAR RESISTANCE

20 mil wear layer with Armor Guard water protection and scratch\scuff resistance.



## SOUND ABATEMENT PAD

The attached Premium Acoustical Pad provides sound-dampening properties in addition to the floor/ceiling assembly.



## BLOCK-AID CORE

Protects your floor from changes due to temperature and adds to the floors durability.

## TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





**CARRARA MARBLE**  
EVC ENGINEERED VINYL CORE

TPWPDLO423  
8.0 MM | 20 MIL



**CONCRETE STAIN MARBLE**  
EVC ENGINEERED VINYL CORE

TPWPDLO422  
8.0 MM | 20 MIL





**CONCRETE STAIN NATURELLE**  
EVC ENGINEERED VINYL CORE

TPWPDL0421  
8.0 MM | 20 MIL



**ITALIAN STONE CREMA**  
EVC ENGINEERED VINYL CORE

TPWPDLO420  
8.0 MM | 20 MIL



**ITALIAN STONE GRIGIO**  
EVC ENGINEERED VINYL CORE

TPWPD0419  
8.0 MM | 20 MIL





**LIMESTONE VEIN CUT**  
EVC ENGINEERED VINYL CORE

TPWPD0424  
8.0 MM | 20 MIL





**\*LINEAR STONE BEIGE**  
EVC ENGINEERED VINYL CORE

TPWP0416  
8.0 MM | 20 MIL



**\*LINEAR STONE GREY**  
EVC ENGINEERED VINYL CORE

TPWP0415  
8.0 MM | 20 MIL



**PELLO ROCK NATURAL**  
EVC ENGINEERED VINYL CORE

TPWPDLO417  
8.0 MM | 20 MIL





**PELLO ROCK SANDSTONE**  
EVC ENGINEERED VINYL CORE

TPWPDLO418  
8.0 MM | 20 MIL

# SPARTA

EVC | 8.0 MM, 20 MIL

Construction	Premium Engineered Vinyl Core Plank
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	<b>Plank:</b> 7" Wide x 48" Long   <b>Tile:</b> 12" Wide x 24" Long
Overall Thickness	8.0 mm (Includes 1.5mm Premium Pad)
Attached Pad	1.5 mm Premium Pad
Wear Layer	20 mil
Finish Coat	Anti-Microbial   Anti-Scratch
Texture	Embossed
Edge Profile	Plank: Micro Bevel   Tile: Painted Bevel
Packaging	19.375 sf/ctn - 66 ctn/ptl - 1278.8 sf/ptl

## Installation & Maintenance

Angle/Angle

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.  
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor


## Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass >250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

## Health & Environmental

FloorScore SCS Certified  
Phthalate-Free

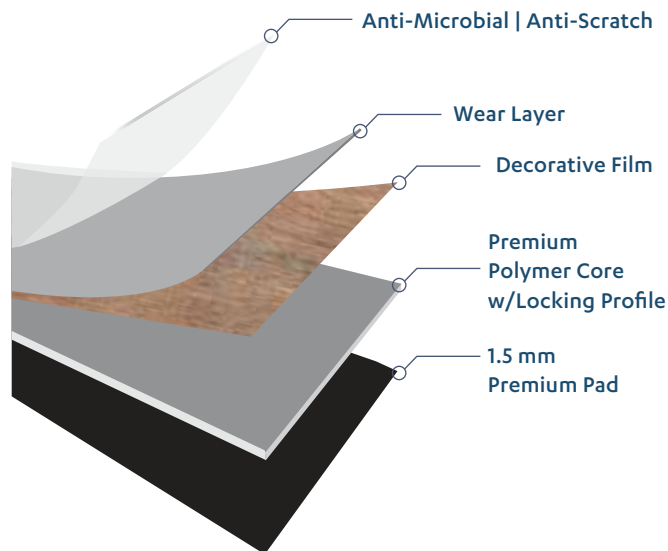

## Warranty

10 Year Light Commercial, 10 Year Multi-Family,  
Lifetime Residential.

## Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

## Layout Options:

NOT TO SCALE



ASHLAR



STAGGER



PLATFORMS  
LUXURY VINYL



Scan the QR Code to view Platforms, our  
TAS Contract custom flooring program.