

SPECMASTER 5.0 MM


GLUE DOWN | 5.0 MM, 20 MIL



Moraga | CTLV0401



Groove | CTLV0402

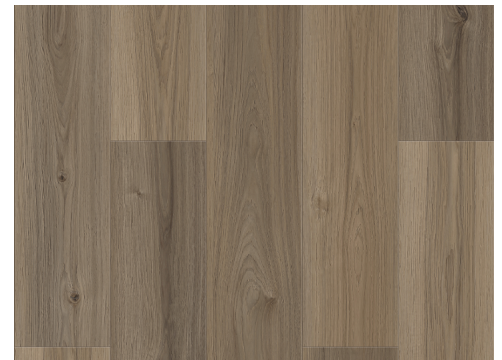

Balboa | CTLV0403



Belvedere | CTLV0404



Skyline | CTLV0405



Granville | CTLV0406

SPECIFICATIONS

Construction	Solid Luxury Vinyl
Classification	ASTMF 1700, Class III, Type B
Dimensions	7.25" Wide X 48" Long
Overall Thickness	5.0 mm
Wear Layer	20 mil
Finish Coat	Low Gloss, UV Ceramic Coating
Texture	Embossed
Edge Profile	Rolled Edges
Packaging	22.026 sf/ctn, 50 ctn/plt, 1101 sf/plt
Installation	Glue Down
Warranty	15 Yr Light commercial/multi-family, Lifetime residential.

INSTALLATION FAST FACTS

- Acclimate to Normal Room Conditions (NRC) 65°F - 85°F
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 60%
- Work out of several boxes, mixing product for visual appearance
- Minimum 3500 PSI for Concrete/Gypcrete Substrates

Read Complete Instructions Before Installing



tascontract.com

**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
QNOSE**



Additional specifications, full installation/maintenance and warranty information available online at TASCONTRACT.COM.