



MONUMENT

LAMINATE | 8 MM, 2.0MM PAD

TAS
CONTRACT

TASCONTRACT.COM


MONUMENT

LAMINATE | 8 MM, 2.0MM PAD | 9.5" X 60"



ADAMANTINE PROTECTION

Experience durability with our proprietary Adamantine Protection technology, providing high scratch resistance to keep your floors looking pristine for years to come. This innovative feature ensures long-lasting beauty and performance.



WIDE AND LONG PLANKS

The Monument Collection boasts 9.5" wide and 60" long planks, creating a visually stunning appearance while simplifying the installation process. These premium planks enhance the overall aesthetic of any room, adding depth and dimension to your space.



SEAMLESS INSTALLATION

Say goodbye to transitions with the Monument Collection. With no transitions necessary for rooms up to 66' x 66', this flooring solution offers a seamless and aesthetically pleasing installation process. Enjoy a cohesive look throughout your space, enhancing its overall charm and appeal.



STUNNING COLOR PALETTE

Choose from a beautiful range of colors with a low gloss finish, allowing you to achieve the perfect look for your space. Whether you prefer classic or contemporary, the Monument Collection offers a variety of stunning colors to suit your style and preferences.

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.




QNose



CABRILLO
WATER RESISTANT CORE LAMINATE

SCLA0101
8 MM | 2.0MM PAD



MCHENRY
WATER RESISTANT CORE LAMINATE

SCLA0102
8 MM | 2.0MM PAD



STANWICK
WATER RESISTANT CORE LAMINATE

SCLA0103
8 MM | 2.0MM PAD



NEWBERRY
WATER RESISTANT CORE LAMINATE

SCLA0104
8 MM | 2.0MM PAD



RUSSELL
WATER RESISTANT CORE LAMINATE

SCLA0105
8 MM | 2.0MM PAD



SONORA
WATER RESISTANT CORE LAMINATE

SCLA0106
8 MM | 2.0MM PAD



WACO
WATER RESISTANT CORE LAMINATE

SCLA0107
8 MM | 2.0MM PAD



VERMILLION
WATER RESISTANT CORE LAMINATE

SCLA0108
8 MM | 2.0MM PAD

MONUMENT

LAMINATE | 8 MM + 2.0 MM PAD

Construction	Water Resistant Core Laminate
Classification	EN 13329
Dimensions	9.5" Wide x 60" Long
Overall Thickness	10 mm (includes 2.0 mm EVA Pad)
Attached Pad	2.0 mm EVA Pad
Wear Surface	AC4 Rated
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	31.31 sf/ctn, 44 ctn/plt, 1377.6 sf/plt

Installation & Maintenance

Angle/Angle

Transition: Transition required for rooms larger than 66' W x 66' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor

Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	


*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

FloorScore SCS Certified

GreenGuard Gold

Adamantine Protection

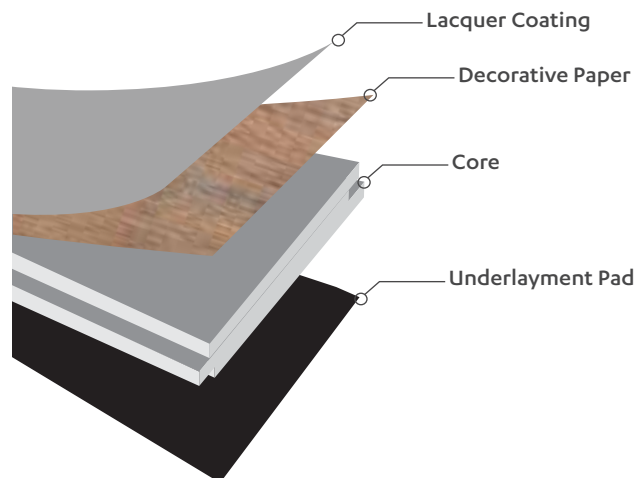

Warranty


15 Yr Light Commercial, 15 Yr Limited Multi-Family, Lifetime Residential, 80 hour Topical

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNoise](#) Stair Nosing

Layout Options:

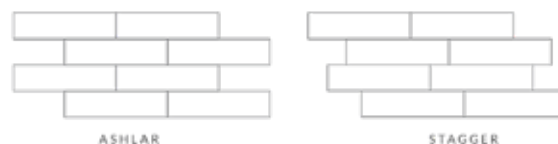

TAS
CONTRACT
TASCONTRACT.COM



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.