

# COORDINATING MOLDINGS

WE CREATE **COORDINATING MOLDINGS**, NOT **PERFECT MATCHES**, BECAUSE YOUR FLOORS AND OUR MOLDINGS USE DIFFERENT PRINTING METHODS & MATERIALS.

# TAS

## FLOORING


Professional Flooring Solutions

## TAS Flooring Stocking Profiles and Technical Information

### Moisture-Proof Quarter Round




**Surface Material:** Decorative Paper  
**Core Material:** Exterior Grade Composite Wood Product



### Moisture-Proof End Cap




**Surface Material:** High Wear Resistant Aluminum Oxide Laminate  
**Core Material:** Exterior Grade Composite Wood Product



### Moisture-Proof T-Molding




**Surface Material:** High Wear Resistant Aluminum Oxide Laminate  
**Core Material:** Exterior Grade Composite Wood Product



### Moisture-Proof Reducer




**Surface Material:** High Wear Resistant Aluminum Oxide Laminate  
**Core Material:** Exterior Grade Composite Wood Product



### VersaEdge Extra Tall



**Stair Nose - 1.5" Height**  
**Surface Material:** High Wear Resistant Aluminum Oxide Laminate  
**Core Material:** Aluminum

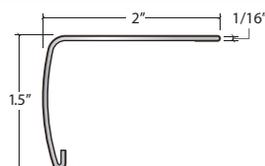

All Moldings are 94" Long  
1 Piece minimum

Terms: Credit applications are under the "How To Order" tab on the Versatrim Website.

**This is a custom product and is non-returnable**



## All Profiles (Non-Stock)




**Slim Trim P-29**  
For Flooring Up to 1/4" (6.35 mm)\*\*

### Slim Trim


Functions as a Reducer, T-Molding, and End Cap.

**Surface Material:** High Wear Resistant Aluminum Oxide Laminate  
**Core Material:** Slim Trim: PVC

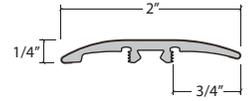


**Slim Trim P-54**  
For Flooring Up to 1/4-3/8" (6.35-9.5 mm)\*\*

**SlimTrack - Included with Slim Trim-P29, P31, and P54**  
**Material:** Cold Roll Steel.




**Slim Trim P-32**  
For Flooring Up to 3/4" (19 mm)\*\*

**Versatrack Shim - 1 Included with Slim Trim-P29 & P31 and 2 with Slim Trim-P54**  
**Material:** Standard HDF




**Slim Trim P-31**  
For Flooring Up to 3/4" (19 mm)\*\*

**Dowel - Included with Slim Trim-P32**  
**Material:** High Density Polyethylene




### Slim Cap

**Surface Material:** High Wear Resistant Aluminum Oxide Laminate  
**Core Material:** PVC




**SlimTrack - Included with Slim Cap-P29 and P54**  
**Material:** Cold Roll Steel.



**Slim Cap P-29**  
For Flooring Up to 3/8" (9.5 mm)\*\*


**Versatrack Shim - 1 Included with Slim Cap-P29 and 2 with Slim Cap-P54**  
**Material:** Standard HDF



### RSN

**Round Stair Nose**

**Surface Material:** High Wear Resistant Aluminum Oxide Laminate  
**Core Material:** PVC

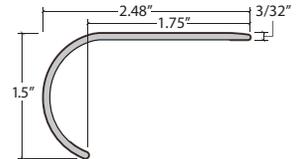


**Slim Cap P-54**  
For Flooring Up to 3/8-1/2" (9.5-12.7 mm)\*\*

### Bullnose Shim

*(Sold Separately)*  
To be used to install the RSN on **Box Staircases** to create a rounded step and to add more stabilization.

**Material:** Standard HDF




**RSN**

### VersaEdge

**Moisture Proof**

**Stair Nose - 1" Height**

**Surface Material:** High Wear Resistant Aluminum Oxide Laminate  
**Core Material:** PVC

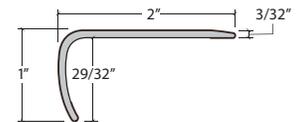


**Bullnose Shim**

### VT-VE(X) Shims

*(Sold Separately)*

For Use with **VersaEdge Extra Tall** and **VersaEdge** for flush install.


**Material:** Standard MDF/HDF



**VersaEdge**

### Quarter Round

**Surface Material:** Decorative Paper  
**Core Material:** Standard MDF




**VT-VE(X) Shims**

### Versatrack

*(Sold Separately)*

To be used with **Moisture-Proof End Cap**, **Moisture-Proof Reducer**, and **Moisture-Proof T-Molding** for flooring 9/32-15/32" (7-12 mm).

**Material:** Cold Roll Steel




**Quarter Round**

### Versatrack Shim

*(Sold Separately)*

To be used with **Moisture-Proof End Cap**, **Moisture-Proof Reducer**, and **Moisture-Proof T-Molding** in conjunction with the **Versatrack** for flooring from 15/32-5/8" (12-16 mm).

**Material:** Standard HDF



**Versatrack Shim**

FOR INSTALLATION INFORMATION, TIPS, AND ADVICE GO TO: [INSTALLATIONADVICE.COM](http://INSTALLATIONADVICE.COM)

\*\*The overall flooring assembly thickness refers to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. the underlayment, either attached or loose lay and any additional vapor barriers.

# Ordering Options for Our Customers

## Order Through T&A Supply

T&A Supply stocks all moisture-proof end caps, reducers, T-moldings, quarter rounds, and stair noses. Call **800-562-2857** or email your order to **ordersdesk@tasupply.com**. Your trim will ship via your regular shipping and routing process at no additional cost.

## Order Direct Through Versatrim

If you choose to order directly from Versatrim (for both stocking and non-stock items), you will be responsible for all additional shipping costs. Shipping costs are based on actual order weight and will be confirmed at the time of your order confirmation. Please call Versatrim at **866-200-8132** or email them at **orders@versatrim.com** for shipping rates to Hawaii, Alaska, or any location outside the continental U.S. Please reference the shipping policy below for this option.

**Important Note:** When ordering through Versatrim, you are also responsible for managing trim logistics and routing.

## Shipping Quantities

Quantities may vary when packaging option selected.

Product	Pieces per 3" Tube	Pieces per 6" Tube	Pieces per Box	Boxes per Pallet
Slim Trim	8	34	5	220
Slim Cap	10	35	5	220
RSN	4	30	5	220
VersaEdge	8	40	5	220
VersaEdge Extra Tall	6	35	5	220
Quarter Round (Standard & Moisture-Proof)	13	50	10	220
Moisture-Proof End Cap	12	50	10	220
Moisture-Proof Reducer	10	40	10	140
Moisture-Proof T-Molding	10	45	10	140

## Shipping Policy

Pricing effective January 11, 2024, for all orders placed directly through Versatrim.™

**All shipping costs will be based on the actual order weight and shown on the order confirmation.**

Please contact our customer service department for shipping charges for Hawaii, Alaska and any location outside the United States of America.

## Transit Time


\*Transit times reflect **standard business days** which does not include Saturday or Sunday. **Saturday delivery may be available upon request at an additional cost.**

Lead times are for FedEx Ground Shipments. LTL Shipments with trucking companies have a similar transit time, for exact transit times please contact your sales associate.

**Transit may take an additional day or two at times.**

**A \$5.00 Handling Fee Will Be Added to All Orders**

Effective May 1, 2023

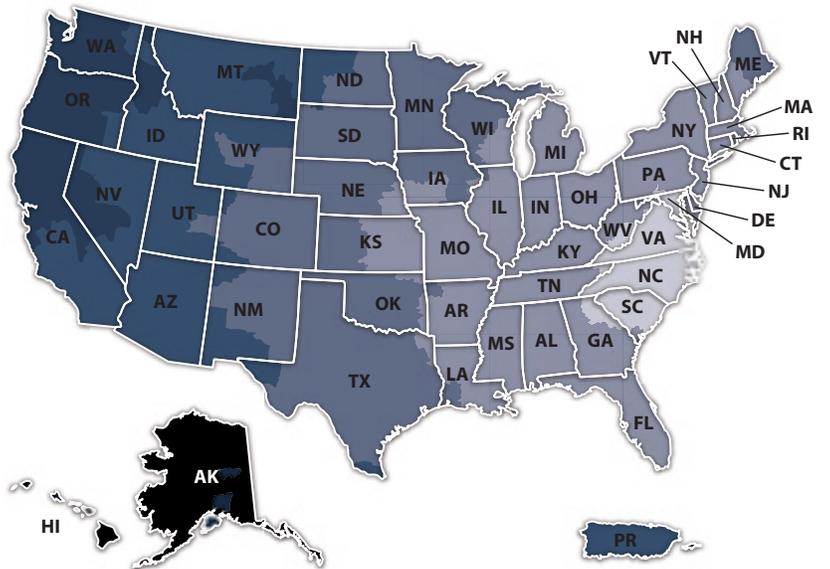

7 Days 6 Days 5 Days 4 Days 3 Days 2 Days 1 Day

**TAS Flooring Does Not Carry Stock of All Versatrim Moldings. Contact Versatrim Directly For Orders & Returns.**

T&A Supply Company, Inc. 6821 S 216th Street, Kent, Washington 98032

Email: [orders@tasupply.com](mailto:orders@tasupply.com) • [www.tasflooring.com](http://www.tasflooring.com)

Versatrim LLC, 101 Eastern Minerals Road, Henderson, NC 27537 USA

Email: [orders@versatrim.com](mailto:orders@versatrim.com) • [www.versatrim.com](http://www.versatrim.com)

distributed by

**T A S**  
CONTRACT